


# TOLEDO FLAT round

901588.002.1.76 | Surface mounted downlights



Surface mounted downlights  
4051859151869  
D 500, H 63

Ceiling mounting, Wall (surface)  
white

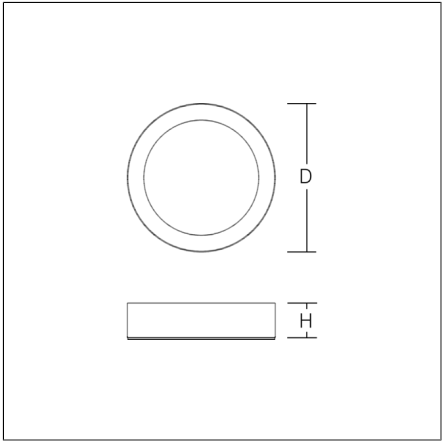

Ultra thin surface mounted downlight. Cylinder housing sheet steel, powder-coated. Bezel ring: die-cast aluminium, powder-coated. Light-guide and diffuser made of non-yellowing PMMA, prismatic. Suitable for Ceiling mounting, Wall (surface). Driver integrated.

### Product specifications

Diameter D	500 mm
Height H	63 mm
Weight	3.95 kg
Light source	LED
Colour temperature	4000 K
Rated luminous flux	3550 lm
System power	30 W
System efficiency	118 lm/W
Glare evaluation UGR (4H 8H)	21,4
Beam angle	88°
Rated life	50000 h (L80/B50)
Colour rendering index (CRI)	80
Colour tolerance	4
Photobiological safety according to EN 62471	Risk group 0
Driver	Converter, dimmable
Control	DALI
Voltage	220 - 240 V / 50 - 60 Hz
Luminaires on B10A fuse	10
Luminaires on B16A fuse	16
Inrush current / Inrush current duration	5.5 A / 55 µs
CIE Flux Code / CEN Flux Code	60 86 96 100 100
Type of protection	IP 40
Protection class	II
Filament test	650°C - 30 seconds
Impact resistance	IK06
Ambient temperature	-20 °C ... + 35 °C
Conformity mark	CE, EAC

### Accessories



983000.002  
Anti-Glow Module