



TRIXY round

672588.002 | Combined luminaires for escape route illumination

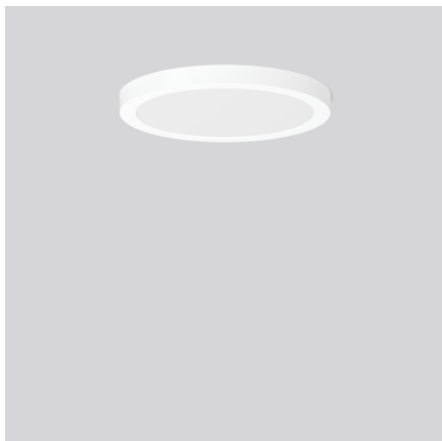

Recessed downlights
4051859911166
D 300, H 25

Recessed ceiling mounting
white

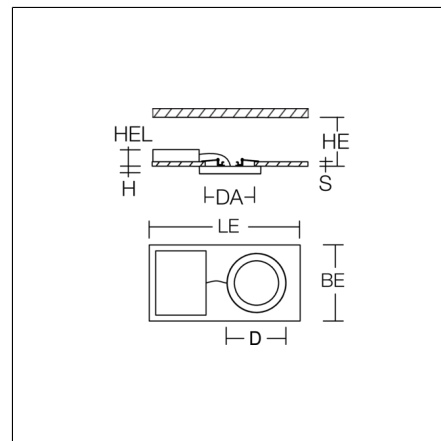

Round recessed downlight. For escape route illumination. Housing made of UV-resistant polycarbonate. Perfect heat management with an aluminium heat sink. Diffuser: plastic (PMMA), transparent, with opal reflector foil. Lateral light emission (RZB SIDELITE® technology) for homogeneous light distribution. MultiColour: With rear switching element, variable colour temperature 3000 K or 4000 K. Factory setting is 4000 K. MultiLumen: 3 steps adjustable luminous flux. Factory setting is the highest luminous flux. MultiCutOut: With adjustable spring clamps, different ceiling cut-outs can be individually adhered to. Suitable for ceiling cut-outs with Ø from > 120 to 260 mm. Suitable for Recessed ceiling mounting. Including separate LED converter with connecting cable 250 mm. Self-contained system with automatic self-test. External driver with simple plug-in locking system.

TRIXY round

672588.002 | Combined luminaires for escape route illumination



Product specifications

Typ of emergency lighting	Self-contained system
Monitoring	Autotest
Battery	LiFePO4
Duration	8 h
Operating mode	maintained power mode
Diameter D	300 mm
Height H	25 mm
Cut-out diameter DA	120-260 mm
Installation space height HE	165 mm
Luminaire: recess height HEL	65 mm
Ceiling thickness S	5-25 mm
Weight	1.37 kg
Light source	LED
Colour temperature	3000 K 4000 K
Rated luminous flux, mains operation	3000 K: 1600 lm 2300 lm
	4000 K: 1750 lm 2600 lm
System power, mains operation	3000 K: 16 W 24 W
	4000 K: 16 W 24 W
Rated luminous flux, emergency operation	150 lm
System efficiency	3000 K: 100 lm/W 96 lm/W
	4000 K: 109 lm/W 108 lm/W
Glare evaluation UGR (4H 8H)	3000 K: 24,8 26,1
	4000 K: 25,1 26,5
Beam angle	113°
Rated life	40000 h
Colour rendering index (CRI)	80
Photobiological safety according to EN 62471	Risk group 1
Driver	Converter
Control	on/off
Voltage	220 - 240 V / 50 Hz, 60 Hz
Luminaires on B10A fuse	60
Luminaires on B16A fuse	96
Luminaires on C10A fuse	60
Luminaires on C16A fuse	96
Inrush current / Inrush current duration	17.2 A / 41 µs
CIE Flux Code / CEN Flux Code	47 78 95 100 100
Type of protection	IP 20
Protection class	II
Filament test	650 °C
Impact resistance	IK03
Ambient temperature for maintained power	5 °C ... + 35 °C
Conformity mark	CE