
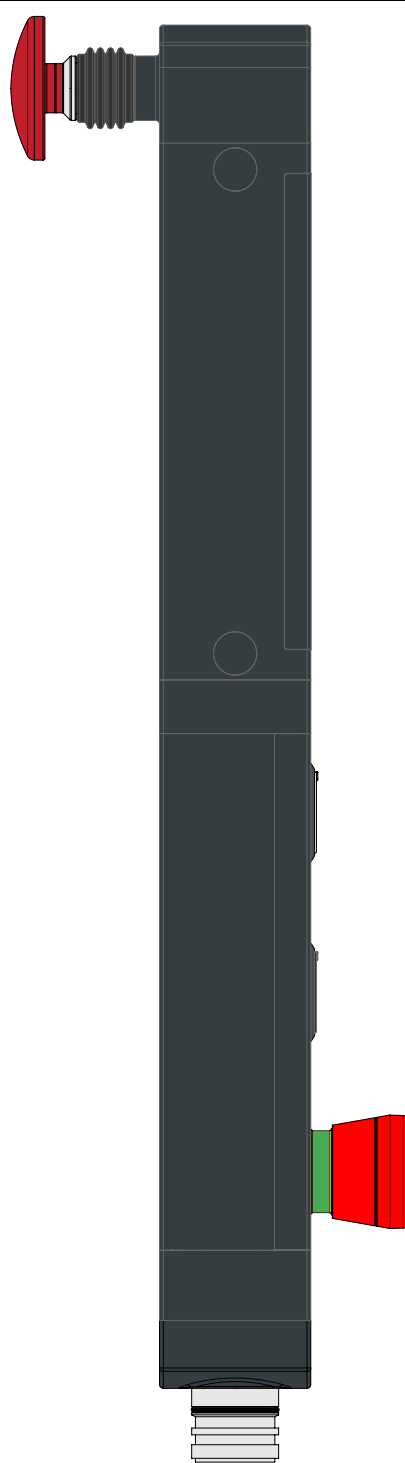


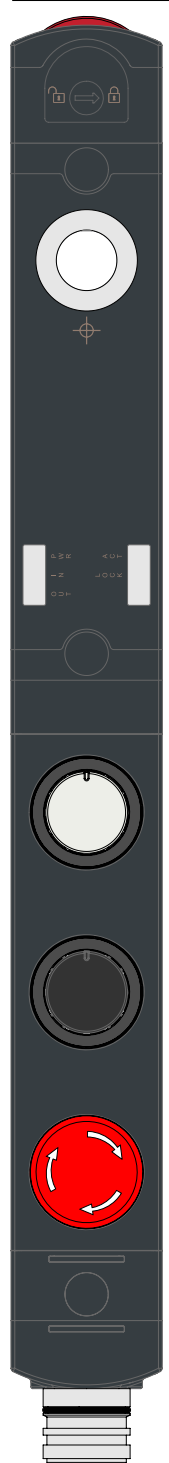

Options

Illuminated
button
spring-return


Non-illuminated
button
spring-return

Emergency
push button

Connection		
Safety switch	A1	Supply input +24 Vdc
	A2	Supply input 0 Vdc
	IS1	Safety input
	OS1	Safety output
	IS2	Safety input
	OS2	Safety output
	IE1	Solenoid activation input for double channel mode
	IE2	Solenoid activation input for double channel mode
	O3	Signalling output, actuator inserted
	O4	Signalling output, actuator inserted and locked
	I3	Actuator programming input / reset
	I5	EDM input (a)
	I4	Solenoid activation input for single channel mode

(a) Available for NS *5**[***-]*** version only

Connections		
Contacts	Diagram	
Device 1	1NO	12—17 18—19
		13
Device 2	1NO	12—15 16—19
		13
Device 3	2NC	10—11 13—14
		12



Connector	M23 with 19 pole at the bottom	
-----------	-----------------------------------	---