


CENTRYXX W IP65plus

672139.999 | Stand-by luminaires for escape route illumination



Wall luminaires
4051859657279
L 117, B 190, H 190

Wall (surface)
graphite grey (RAL 7024)

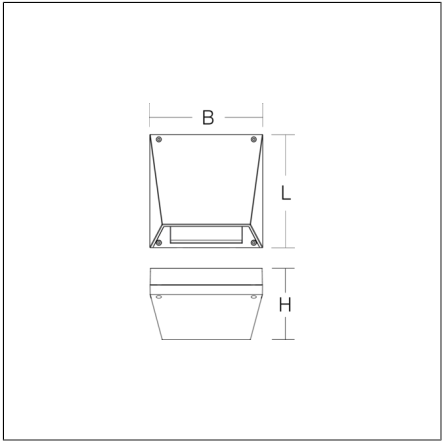

Wall luminaire for escape route illumination. Housing: die-cast aluminium, powder-coated. Electronic ballast included. Self-contained system with automatic self-test. with battery heating.

Product specifications

Typ of emergency lighting	Self-contained system
Monitoring	Autotest
Battery	NiMh
Duration	3 h
Operating mode	non-maintained power mode
Length L	117 mm
Width B	190 mm
Height H	190 mm
Weight	2.1 kg
Light source	LED
Colour temperature	6500 K
Rated luminous flux, mains operation	370 lm
System power, mains operation	6,6 W
Rated luminous flux, emergency operation	390 lm
System efficiency	56 lm/W
Glare evaluation UGR (4H 8H)	40,5
Beam angle	90°/60°/29°/60°
Colour rendering index (CRI)	70
Driver	Converter
Control	on/off
Voltage	230 V / 50 - 60 Hz
CIE Flux Code / CEN Flux Code	39 66 86 96 100
Type of protection	IP 65
Protection class	I
Filament test	960°C - 30 seconds
Impact resistance	IK07
Ambient temperature for maintained power	-20 °C ... + 30 °C
Ambient temperature for non-maintained power mode	-20 °C ... + 35 °C
Conformity mark	CE