


BASIC BALL

312127.002.1.76 | Pendant luminaires



Pendant luminaires
4051859165118
D 630, H 630

pendant
white

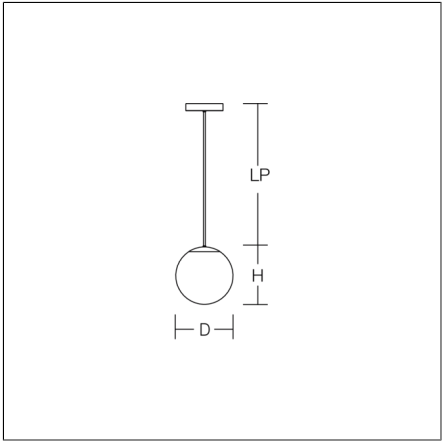

Pendant luminaire in timelessly classic sphere design. Base: metal, chrome. Canopy: metal, chrome-plated. Diffuser: shockproof plastic (polyethylene), opal, satin finish. Shadow-free, homogeneous and soft illumination. Incl. mounting plate with connecting terminal and mounting material for pendant tube. Pendant tube must be ordered separately!

Product specifications

Diameter D	630 mm
Height H	630 mm
Weight	10.3 kg
Light source	LED
Colour temperature	4000 K
Rated luminous flux	10000 lm
System power	79 W
System efficiency	127 lm/W
Glare evaluation UGR (4H 8H)	18,5
Beam angle	down 180° up 180°
Rated life	50000 h (L80/B10)
Colour rendering index (CRI)	90
Colour tolerance	3
Photobiological safety according to EN 62471	Risk group 1
Driver	Converter, dimmable
Control	DALI
Voltage	220 - 240 V / 50 Hz, 60 Hz
Luminaires on B10A fuse	4
Luminaires on B16A fuse	7
Luminaires on C10A fuse	7
Luminaires on C16A fuse	12
Inrush current / Inrush current duration	40 A / 400 µs
CIE Flux Code / CEN Flux Code	25 50 75 54 100
Type of protection	IP 40
Protection class	I
Filament test	750 °C
Impact resistance	IK10
Ambient temperature	-25 °C ... + 35 °C
Conformity mark	CE, EAC

Accessories



981222.000
Adaptor, aluminium



981230.0044
Connection sleeve, M13 x 1, chrome-plated, for pendant tube extension

BASIC BALL

312127.002.1.76 | Pendant luminaires



Modules



982229.0044
Pendant tube (can be shortened on site) 1000 mm




982230.0044
Pendant tube (can be shortened on site) 1500 mm



982231.0044
Pendant tube (can be shortened on site) 2000 mm

Spareparts



08-311378.012
Replacement diffuser