

Axyl Greet B

THORN


96700704 AXYL GREETB H870 DE 56L 930 A/S HFX ANT

LED 36W AXYL_GB_DE_930 IP65 IK06  


Axyl Greet B

AXYL Greet B, a free-standing, decorative LED bollard with asymmetrical distribution. Class II electrical.. DALI-2 dimmable LED driver. , IP65, Impact strength: IK06. Housing: die-cast aluminium, powder coated textured anthracite. Working ambient temperature: -20°C to +50°C. Complete with 3000K LED..


Dimensions: 130 x 290 x 870 mm
Luminaire input power: 35.6 W
Luminaire luminous flux: 1754 lm
Luminaire efficacy: 49 lm/W
Weight: 8.87 kg

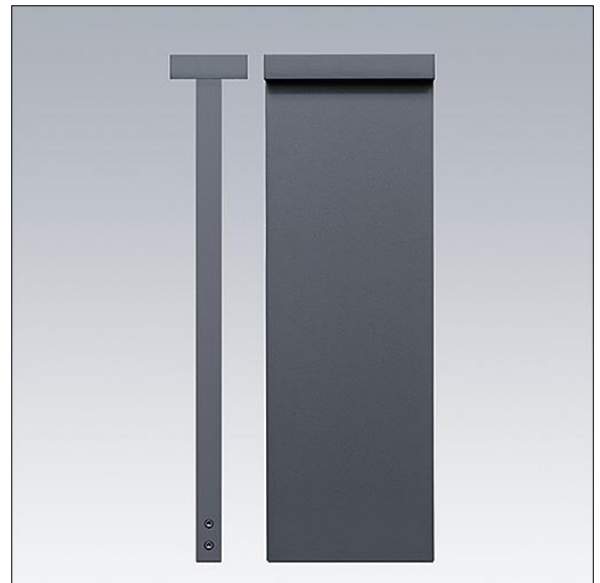

TLG_AXYL_F_GREET_B_L_DE_ANT.jpg

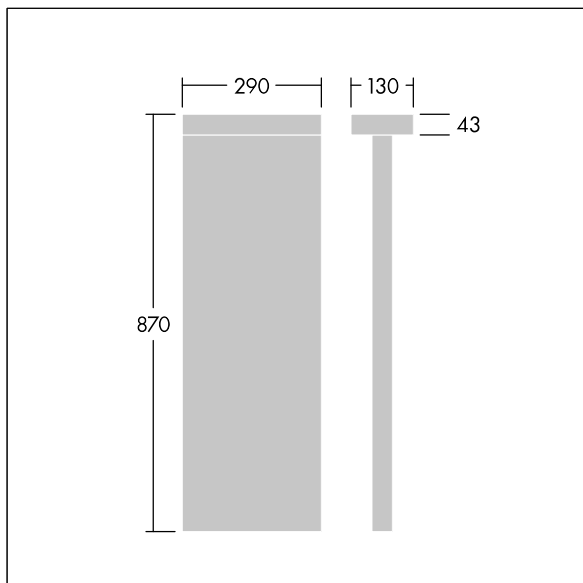

TLG_AXYL_M_GREET_B_L_DE.wmf

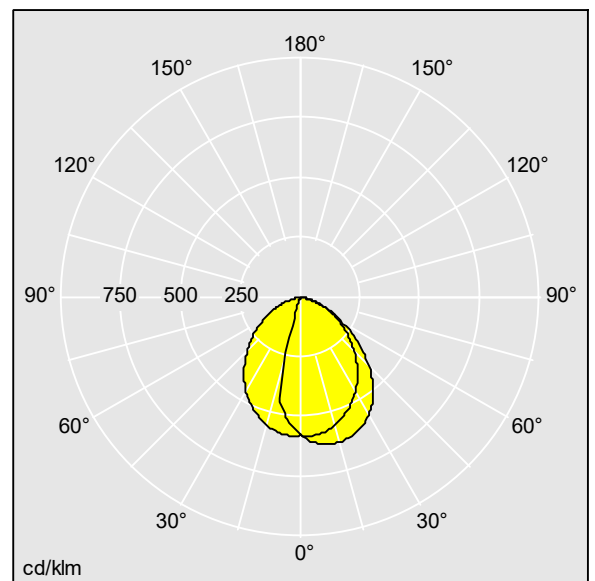

96700704.ltd

Lamp position: STD - standard
Light Source: LED
Luminaire luminous flux*: 1754 lm
Luminaire efficacy*: 49 lm/W
Colour Rendering Index min.: 90
Correlated colour temperature*: 3000 Kelvin

Chromaticity tolerance (initial MacAdam): 3
Rated useful life (B10)*:
L80 70000 h at 25 °C
Ballast: 1x LED_DRV
Luminaire input power*: 35.6 W Power factor = 0.95
Dimming: Dali2Dim
LOR: 1,00 ULOR: 0,00 DLOR: 1,00

This product contains a light source of energy efficiency class C.

All values marked with an * are rated values. Thorn uses tried and tested components from leading suppliers, however there may be isolated instances of technology-related failures of individual LEDs during the rated product lifetime. International standards set the tolerance in initial flux and connected load at $\pm 10\%$. Unless stated otherwise, the values apply to an ambient temperature of 25°C.

Thorn Lighting is constantly developing and improving its products. The right is reserved to change specifications without prior notification or public announcement.
© Thorn Lighting