



# Corepro - LED HID HPL



## TForce Core LED HPL 36W E40 830 FR

Philips TrueForce Core LED HPL lamps are an easy, LED solution with a short pay-back to replace High Intensity Discharge (HID) lamps. This new generation of LED Core Post-Top lamps brings all the energy-efficiency and long-lifetime benefits of LED to HID replacement, while delivering instant saving for a low initial investment. Furthermore, TrueForce CorePro LED HPL lamps are designed to have the same lamp size and light distribution as their HID alternatives. And thanks to our high-power LED filament technology, you'll never know the difference. Plus, their unique IP65 design means that TrueForce Core LED HPL Post-Top lamps can be used for outdoor, as well as indoor applications.

### Warnings and Safety

- Installation should always be performed by a qualified electrician or installer. Use the installation guide for instructions.

### Product data

General Information	
Cap-Base	E40
Nominal lifetime	25,000 hour(s)
Switching Cycle	50,000
Lighting Technology	LED
Flux measurement reference	Sphere

Light Technical	
Color Code	830 [CCT of 3000K]
Beam Angle (Nom)	300 degree(s)
Luminous Flux	5,500 lm
Color Designation	White (WH)
Correlated Color Temperature (Nom)	3000 K

Operating and Electrical	
Luminous Efficacy (rated) (Nom)	152 lm/W
Color Consistency	<6
Color rendering index (CRI)	80
LLMF At End Of Nominal Lifetime (Nom)	70 %
Photobiological safety according to EN 62471	RG0
Line Frequency	50 to 60 Hz
Input Frequency	50 to 60 Hz
Power Consumption	36 W
Lamp Current (Nom)	143 mA
Starting Time (Nom)	0.5 s
Warm-up time to 60% light	0.5 s

## Corepro - LED HID HPL

Power Factor (Fraction)	0.9
Voltage (Nom)	220-240 V
Ballast Compatibility	Mains only
Inrush current at mains	32
Max. lamp no. on MCB B type 10A - Mains	6
Max. lamp no. on MCB B type 10A - EM ballast without Compensation Capacitor.	-
Max. lamp no. on MCB B type 10A - EM ballast with Compensation Capacitor.	-
Max. lamp no. on MCB B type 16A - Mains	10
Max. lamp no. on MCB B type 16A - EM ballast without Compensation Capacitor.	-
Max. lamp no. on MCB B type 16A - EM ballast with - Compensation Capacitor.	-

### Temperature

T-Case Maximum (Nom)	43.3 °C
----------------------	---------

### Controls and Dimming

Dimmable	No
----------	----

### Mechanical and Housing

Bulb Finish	Frosted
Bulb Shape	ED90
Net Weight (Piece)	0.190 kg

### Approval and Application

Energy Efficiency Class	D
-------------------------	---

Energy Consumption kWh/1000 h	36 kWh
EPREL Registration Number	403656
CE mark	Yes
EU RoHS compliant	Yes
Flickering value (PstLM) - Flickering value as per EN 61000-3-3	1
Stroboscopic effect visibility measure (SVM)	1.6
Ambient temperature range	-30 to +45 °C

### Application Conditions

can it be used in closed luminaires	Yes
-------------------------------------	-----

### Product Data

Order product name	TForce Core LED HPL 36W E40 830 FR	
Full product name	TForce Core LED HPL 36W E40 830 FR	
Full product code	871951429931300	
Order code	929002481402	
Material Nr. (12NC)	929002481402	
Numerator - Quantity Per Pack	1	
EAN/UPC - Product/Case	8719514299313	
Numerator - Packs per outer box	6	
EAN/UPC - Case	8719514299320	



## Dimensional drawing



Product	D	C
TForce Core LED HPL 36W E40 830 FR	91.5 mm	234 mm


# Corepro - LED HID HPL

## Photometric data

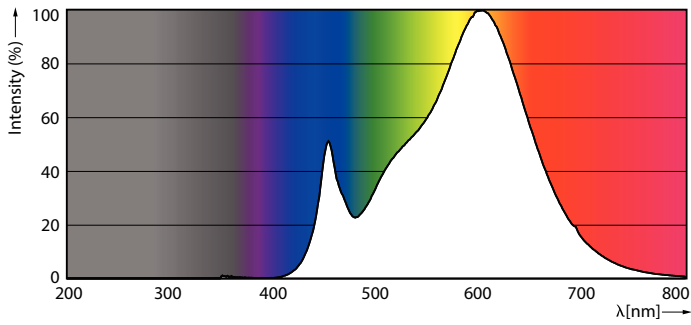


Spectral Power Distribution Colour - TForce Core LED HPL 36W E40 830 FR


General uniform lighting - TForce Core LED HPL 36W E40 830 FR



Light Distribution Diagram - TForce Core LED HPL 36W E40 830 FR





Spectral Power Distribution Colour - TForce Core LED HPL 36W E40 830 FR



Light Distribution Diagram - TForce Core LED HPL 36W E40 830 FR

# Corepro - LED HID HPL

## Lifetime

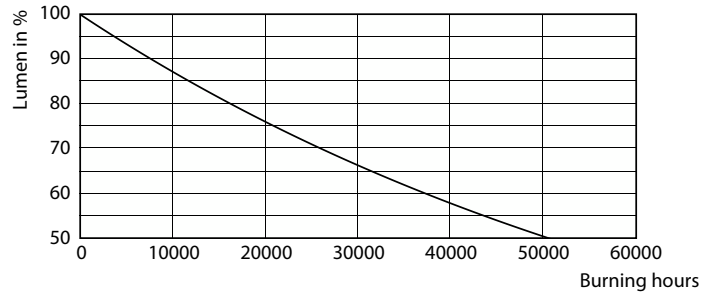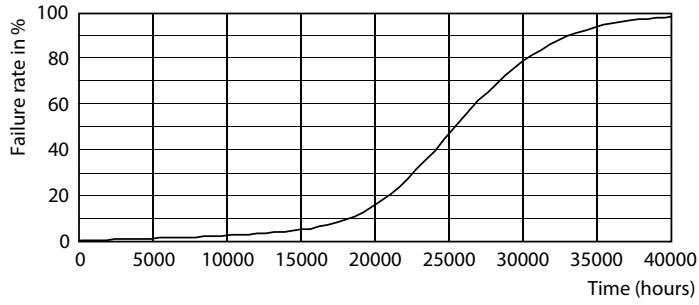

Life Expectancy Diagram

Lumen Maintenance Diagram - TForce Core LED HPL 36W E40 830 FR

