

Cesar Amp

96700093 CESAR AMP M U/D 2L930MB HF ANT

THORN

LED 37W CESA_AMP_M_930_UD	IP65	IK08	⊕	CE	
---------------------------	------	------	---	----	--


Cesar Amp

Cesar Amp a wall mounted, architectural LED luminaire for decorative facade lighting, medium beam distribution. Fixed output LED driver. Class I electrical, IP65, Impact strength: IK08. Housing: die-cast aluminium, powder coated anthracite. Working ambient temperature: -20°C to +45°C. Complete with 3000K LED.


Dimensions: Ø140 x 350 mm
 Luminaire input power: 37 W
 Luminaire luminous flux: 2404 lm
 Luminaire efficacy: 65 lm/W
 Weight: 5.08 kg



TLG_CESA_F_AMP_UD_WB_ANT.jpg

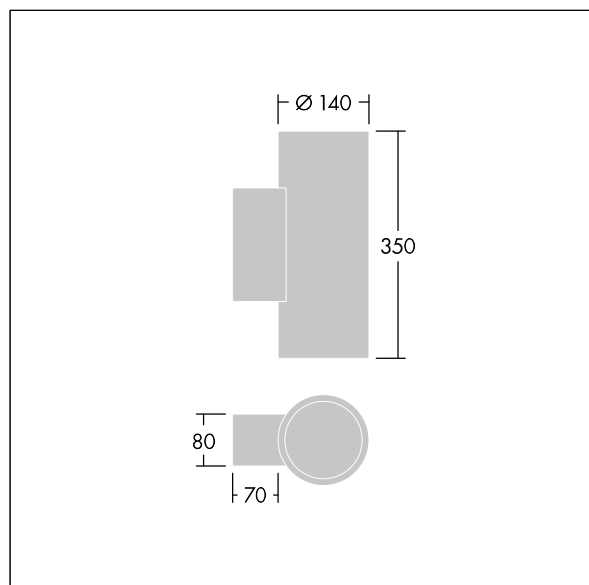

TLG_CESA_M_AMP_M_DWN.wmf

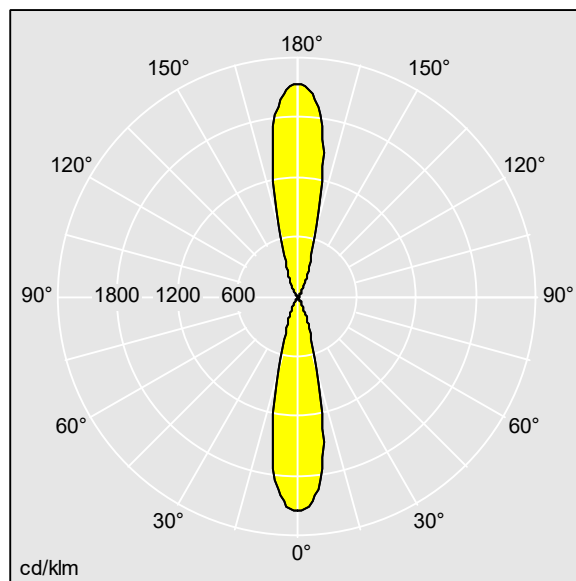

96700093.idt

Lamp position: STD - standard
 Light Source: LED
 Luminaire luminous flux*: 2404 lm
 Luminaire efficacy*: 65 lm/W
 Colour Rendering Index min.: 90
 Correlated colour temperature*: 3000 Kelvin

Chromaticity tolerance (initial MacAdam): 3
 Rated useful life (B10)*:
 L80 70000 h at 25 °C
 Ballast: 1x LED_DRV
 Luminaire input power*: 37 W
 Dimming: FIX
 LOR: 1,00 ULOR: 0,50 DLOR: 0,50

This product contains a light source of energy efficiency class E.

All values marked with an * are rated values. Thorn uses tried and tested components from leading suppliers, however there may be isolated instances of technology-related failures of individual LEDs during the rated product lifetime. International standards set the tolerance in initial flux and connected load at $\pm 10\%$. Unless stated otherwise, the values apply to an ambient temperature of 25°C.

Thorn Lighting is constantly developing and improving its products. The right is reserved to change specifications without prior notification or public announcement.
 © Thorn Lighting