

# Axyl Trim

96700386 AXYL TRIM S VISO 1L930 A/S HF ANT

THORN

|                           |      |      |                                                                                   |                                                                                   |  |
|---------------------------|------|------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|--|
| LED 3W AXYL_TR_S_VS-AS930 | IP65 | IK06 |  |  |  |
|---------------------------|------|------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|--|


## Axyl Trim

AXYL Trim, a wall recessed, architectural LED luminaire for decorative facade lighting, with asymmetrical distribution. Class I electrical.. Fixed output LED driver. , IP65, Impact strength: IK06. Housing: die-cast aluminium, powder coated textured anthracite. Working ambient temperature: - 20°C to +50°C. Complete with 3000K LED..


Dimensions: 106 x 106 x 98 mm  
Luminaire input power: 3.4 W  
Luminaire luminous flux: 49 lm  
Luminaire efficacy: 14 lm/W  
Weight: 0.6 kg



TLG\_AXYL\_F\_TRIM\_S\_VISO\_ANT.jpg

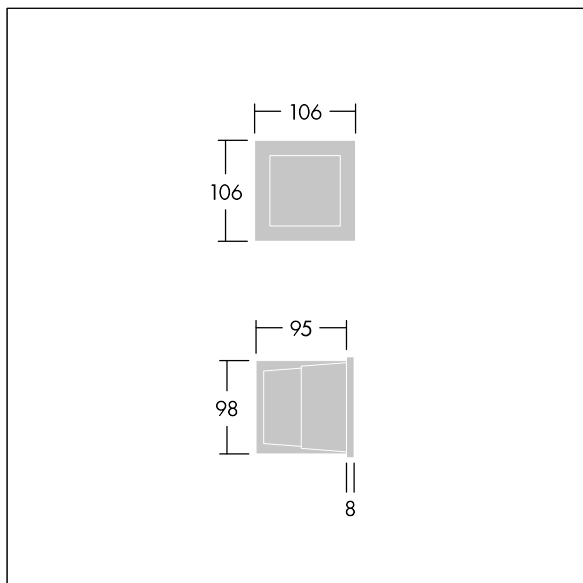

TLG\_AXYL\_M\_TRIM\_S.wmf

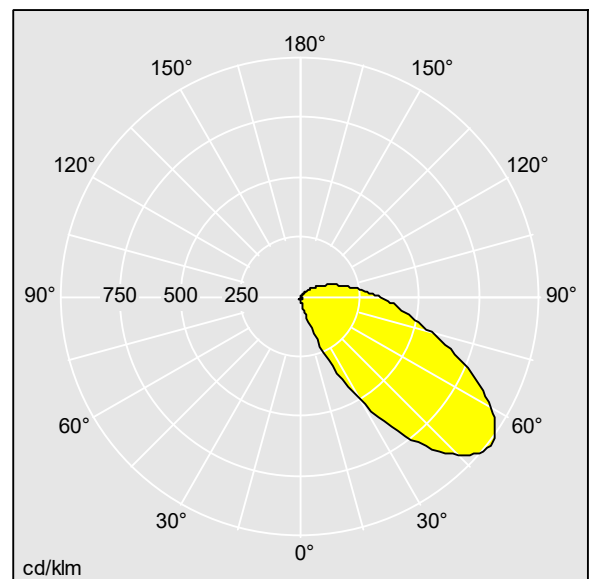

96700386.ltd

Lamp position: STD - standard  
Light Source: LED  
Luminaire luminous flux\*: 49 lm  
Luminaire efficacy\*: 14 lm/W  
Colour Rendering Index min.: 90  
Correlated colour temperature\*: 3000 Kelvin

Chromaticity tolerance (initial MacAdam): 3  
Rated useful life (B10)\*:  
L80 70000 h at 25 °C  
Ballast: 1x LED\_DRV  
Luminaire input power\*: 3.4 W Power factor = 0.4  
Dimming: FIX  
LOR: 1,00 ULOR: 0,16 DLOR: 0,84

This product contains a light source of energy efficiency class E.

All values marked with an \* are rated values. Thorn uses tried and tested components from leading suppliers, however there may be isolated instances of technology-related failures of individual LEDs during the rated product lifetime. International standards set the tolerance in initial flux and connected load at  $\pm 10\%$ . Unless stated otherwise, the values apply to an ambient temperature of 25°C.

Thorn Lighting is constantly developing and improving its products. The right is reserved to change specifications without prior notification or public announcement.  
© Thorn Lighting