



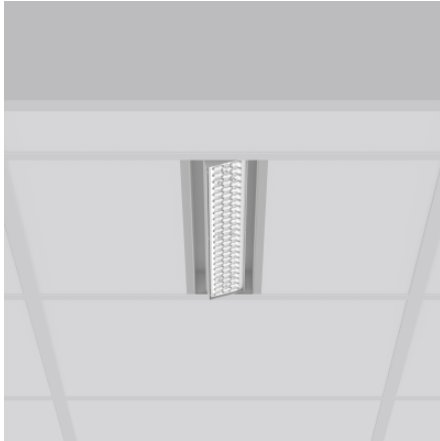

Recessed projectors  
4051859973423  
L 597, B 116, H 39

Lay-in luminaires  
silver, matt (approx. RAL 9006)

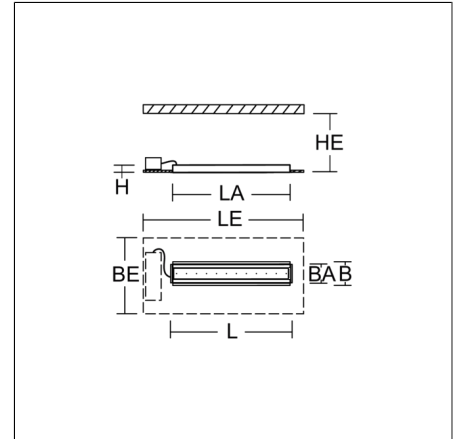

Einlege/Einbau-Flächenstrahler. Housing: sheet steel, powder-coated. Swivel range: 90°. High-efficiency LED units with optimum light control thanks to clear plastic (PC) lens optics. Spezielle Mikrostrukturen reduzieren Gelbsaum. Asymmetrical light distribution. Suitable for laying in grid ceiling module 600. Connected converter included in separate gearbox. Suitable for through-wiring. MultiLumen: Luminous flux adjustable in 3 steps. Accessories: Mounting frame for installation in suspended ceilings. Environmentally friendly and resource-saving due to replaceable and recyclable components.

## Product specifications

|                                              |                               |
|----------------------------------------------|-------------------------------|
| Length L                                     | 597 mm                        |
| Width B                                      | 116 mm                        |
| Height H                                     | 39 mm                         |
| Cut-out length LA                            | 577 mm                        |
| Cut-out width BA                             | 98 mm                         |
| Installation space length LE                 | 675 mm                        |
| Installation space width BE                  | 316 mm                        |
| Installation space height HE                 | 100 mm                        |
| Weight                                       | 2.15 kg                       |
| Light source                                 | LED                           |
| Colour temperature                           | 3500 K                        |
| Rated luminous flux                          | 2750 lm   3800 lm   5350lm    |
| System power                                 | 18 W   26 W   39W             |
| System efficiency                            | 137 lm/W   146 lm/W   153lm/W |
| Glare evaluation UGR (4H 8H)                 | 26,6   27,8   28,9            |
| Beam angle                                   | 35°/50°/0°/50°                |
| Rated life                                   | 50000 h (L80/B10)             |
| Colour rendering index (CRI)                 | 80                            |
| Colour tolerance                             | 3                             |
| Photobiological safety according to EN 62471 | Risk group 1                  |
| Driver                                       | Electronic ballast, dimmable  |
| Control                                      | DALI                          |
| Voltage                                      | 220 - 240 V / 50 Hz, 60 Hz    |
| Luminaires on B10A fuse                      | 31                            |
| Luminaires on B16A fuse                      | 50                            |
| Luminaires on C10A fuse                      | 52                            |
| Luminaires on C16A fuse                      | 85                            |
| Inrush current / Inrush current duration     | 5 A / 50 µs                   |
| CIE Flux Code / CEN Flux Code                | 65 90 98 100 100              |
| Type of protection                           | IP 20 on room side<br>IP 20   |
| Protection class                             | I                             |
| Filament test                                | 850 °C                        |
| Impact resistance                            | IK04                          |
| Ambient temperature                          | 5 °C ... + 25 °C              |
| Conformity mark                              | CE                            |

# TX-MOVE

901726.004.3.76 | Recessed projectors



## Accessories



982866.004

Mounting frame for installation in suspended ceilings.