


LINEDO single IP54

312565.002.76 | Pendant luminaires



Pendant luminaires
4051859678250
L 1710, B 58, H 76

pendant
traffic white, matt (RAL 9016)

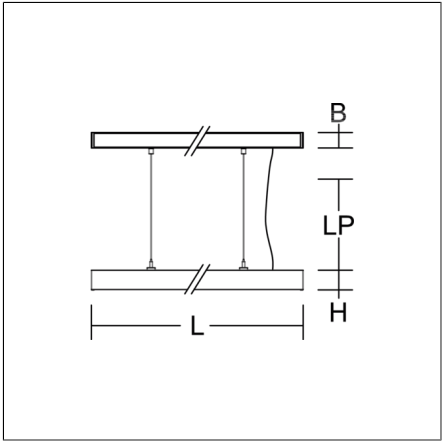

Stylish pendant luminaire. Housing: extruded aluminium profile, powder-coated. Plastic end caps, grey. High-efficiency LED units with optimum light control thanks to clear plastic (PC) lens optics. 2-point steel cable suspension freely positionable and infinitely height-adjustable. With power cord (2.5 m). Please order canopy separately if required. Perfect for office areas ($UGR \leq 19$) and environments with computer screens in accordance with EN 12464-1. Luminaires with limited surface temperature in accordance with EN 60598-2-24 for use in environments in which a deposit of conductive dust on the luminaire can be expected.

Product specifications

Length L	1710 mm
Width B	58 mm
Height H	76 mm
Suspension length LP	100-1500 mm
Weight	3.8 kg
Light source	LED
Colour temperature	3000 K
Rated luminous flux	4550 lm
System power	31 W
System efficiency	147 lm/W
Glare evaluation UGR (4H 8H)	16,7
Beam angle	59°
Rated life	80000 h (L80/B10)
Colour rendering index (CRI)	80
Colour tolerance	3
Photobiological safety according to EN 62471	Risk group 1
Driver	Converter, dimmable
Control	DALI
Voltage	220 - 240 V / 0 Hz, 50 - 60 Hz
Luminaires on B10A fuse	23
Luminaires on B16A fuse	36
Luminaires on C10A fuse	38
Luminaires on C16A fuse	61
Inrush current / Inrush current duration	5 A / 870 µs
CIE Flux Code / CEN Flux Code	86 96 99 100 100
Type of protection	IP 54
Protection class	I
Filament test	850°C - 30 seconds
Impact resistance	IK03
Ambient temperature	-25 °C ... + 50 °C
Safety marks	D-mark
Test marks	ENEC, VDE
Conformity mark	CE

LINEDO single IP54

312565.002.76 | Pendant luminaires



Accessories



982575.012
Canopy