


FLAT SLIM round

672648.002.07 |



Ceiling and wall luminaires
4051859980780
D 300, H 75

Ceiling mounting, Wall (surface)
traffic white, matt (RAL 9016)

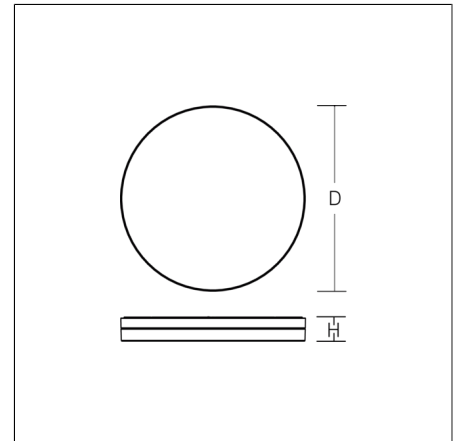

Decorative round surface-mounted luminaire for indoor and outdoor use. Base: pressure die-cast aluminium, powder-coated. Standard Gore™ Protective Vents diaphragm valve to avoid condensation. Mouth blown 3-layer opal glass (Triplex glass) with satin finish. Glass fastening: bayonet fixing. Uniform lighting achieved by the use of LED panel boards. Suitable for Ceiling mounting, Wall (surface). Very easy installation thanks to plug & play connection. The large connection compartment on the back for convenient connections is also ideal for through wiring. Self-contained system with automatic self-test and feedback via DALI bus, only to RZB DALI monitoring system.

FLAT SLIM round

672648.002.07 |



Product specifications

Typ of emergency lighting	Self-contained system
Monitoring	DALI-Sibe
Battery	LiFePO4
Duration	3 h
Operating mode	maintained power mode
Diameter D	300 mm
Height H	75 mm
Weight	2.64 kg
Light source	LED
Colour temperature	3000 K 4000 K
Rated luminous flux, mains operation	3000 K: 1250 lm 2400 lm
	4000 K: 1300 lm 2500 lm
System power, mains operation	3000 K: 16 W 29 W
	4000 K: 16 W 29 W
Rated luminous flux, emergency operation	300 lm
System efficiency	3000 K: 78 lm/W 83 lm/W
	4000 K: 81 lm/W 86 lm/W
Glare evaluation UGR (4H 8H)	3000 K: 21,4 23,7
	4000 K: 21,6 23,9
Beam angle	down 134° up 180°
Rated life	50000 h
Colour rendering index (CRI)	80
Photobiological safety according to EN 62471	Risk group 1
Driver	Converter
Control	on/off
Voltage	220 - 240 V / 50 Hz, 60 Hz
Luminaires on B10A fuse	31
Luminaires on B16A fuse	50
Luminaires on C10A fuse	52
Luminaires on C16A fuse	85
Inrush current / Inrush current duration	5 A / 50 µs
CIE Flux Code / CEN Flux Code	39 69 89 82 100
Type of protection	IP 65
Protection class	I
Filament test	960 °C
Impact resistance	IK03
Ambient temperature for maintained power	5 °C ... + 25 °C
Safety marks	D-mark
Conformity mark	CE, EAC