


# RING OF FIRE

312546.004.1.76 | Pendant luminaires



Pendant luminaires  
4051859503958  
D 690, H 81

pendant  
anodised aluminium

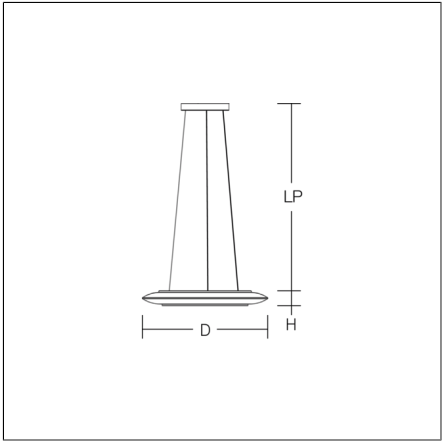

A uniquely shaped pendant luminaire with elliptical glass. Supporting ring made of anodised aluminium. Canopy aluminium anodised. Opal glass: mouth-blown, satin finish. Suitable for pendant. 3-point steel cable suspension, steplessly adjustable. Special lengths available on request.

### Product specifications

|                                              |                                  |
|----------------------------------------------|----------------------------------|
| Diameter D                                   | 690 mm                           |
| Height H                                     | 81 mm                            |
| Suspension length LP                         | 500-1200 mm                      |
| Weight                                       | 7.4 kg                           |
| Light source                                 | LED                              |
| Colour temperature                           | 4000 K                           |
| Rated luminous flux                          | 5800 lm                          |
| System power                                 | 71 W                             |
| System efficiency                            | 82 lm/W                          |
| Glare evaluation UGR (4H 8H)                 | 23,6                             |
| Beam angle                                   | down 114°<br>up 111°             |
| Rated life                                   | 50000 h (L80/B50)                |
| Colour rendering index (CRI)                 | 80                               |
| Colour tolerance                             | 3                                |
| Photobiological safety according to EN 62471 | Risk group 1                     |
| Driver                                       | Converter, dimmable              |
| Control                                      | DALI                             |
| Voltage                                      | 220 - 240 V / 0 Hz, 50 Hz, 60 Hz |
| Luminaires on B10A fuse                      | 6                                |
| Luminaires on B16A fuse                      | 10                               |
| Inrush current / Inrush current duration     | 60 A / 200 µs                    |
| CIE Flux Code / CEN Flux Code                | 43 72 90 52 100                  |
| Type of protection                           | IP 20                            |
| Protection class                             | I                                |
| Filament test                                | 960°C - 30 seconds               |
| Impact resistance                            | IK02                             |
| Ambient temperature                          | 25 °C                            |
| Conformity mark                              | CE, EAC                          |