



# Ledinaire Clear Accent

## RS060B G2 LDNR LED5-36/840 PSR II WH

Ledinaire Clear Accent, Fixed, 6 W, D68 mm, 550 lm, 4000 K, CRI>80, Phase-cut dim, Beam angle 36°, White, IP20

A complete family of LED recessed spots that deliver superior lighting performance. Choose the best fit for every project from fixed/adjustable head with various color temperatures or All-in versions with 3 CCTs combined in one product. Enjoy great reliable performance free of maintenance.

### Product data

General Information		Unified glare rating CEN	
Light source replaceable	No		21
Number of gear units	1 unit	Operating and Electrical	
Driver included	Yes	Input Voltage	220 to 240 V
Lighting Technology	LED	Line Frequency	50 or 60 Hz
Value ladder	Value	Input Frequency	50 or 60 Hz
Warranty period	3 years	Inrush current	1 A
Light Technical		Power Consumption	6 W
Luminous Flux	550 lm	Power Factor (Fraction)	0.9
Correlated Color Temperature (Nom)	4000 K	Connection	AC power connector C13
Luminous Efficacy (rated) (Nom)	91 lm/W	Cable	Cable 0.2 m with cable connector
Color rendering index (CRI)	80	Number of products on MCB of 16 A type B	100
Light source color	840 neutral white	Suitable for random switching	Not applicable
Optic type	Beam angle 36°	Protection class IEC	Safety class II
Luminaire light beam spread	36°	Total harmonic distortion	21 %

## Ledinaire Clear Accent

### Controls and Dimming

Dimmable	Yes
Driver/power unit/transformer	Power supply unit regulating
Control interface	Phase-cut dim
Constant light output	No
Maximum dim level	10% (depends on dimmer, ELV)

### Mechanical and Housing

Housing Material	Metal-Plastic
Reflector material	Polycarbonate aluminum coated
Optic material	Polycarbonate
Optical cover material	Polycarbonate
Fixation material	Steel
Housing Color	White
Optical cover finish	Clear
Overall height	55 mm
Overall diameter	75 mm
Ingress protection code	IP20 [Finger-protected]
Mech. impact protection code	IK03 [0.3 J]
Net Weight (Piece)	0.100 kg

### Approval and Application

Glow-wire test	Temperature 650 °C, duration 30 s
Flammability mark	For mounting on normally flammable surfaces
CE mark	Yes
EU RoHS compliant	Yes
Flickering value (PstLM) - Flickering value as per EN 61000-3-3	0.1

Stroboscopic effect visibility measure (SVM)	0.1
Ambient temperature range	-20 to +40 °C

### Initial Performance (IEC Compliant)

Luminous flux tolerance	+/-10%
Initial chromaticity	(IEC4000K, 0.38, 0.38) <5SDCM
Power consumption tolerance	+/-10%
Standard Deviation of Colour Matching (McAdam ellipse)	SDCM≤5


### Over Time Performance (IEC Compliant)

Driver failure rate at 5000 h	0.6 %
Lumen maintenance (EN-IEC 62722-2-1) at median useful life* 50000 h	L65

### Product Data

Order product name	RS060B G2 LDNR LED5-36/840 PSR II WH
Full product name	RS060B G2 LDNR LED5-36/840 PSR II WH
Full product code	871951433121100
Order code	929002669832
Material Nr. (12NC)	929002669832
Numerator - Quantity Per Pack	1
EAN/UPC - Product/Case	8719514331211
Numerator - Packs per outer box	24
EAN/UPC - Case	8719514331228



### Dimensional drawing

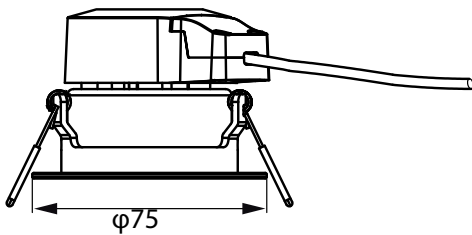

Cut-out hole diameter - Ø68mm

# Ledinaire Clear Accent

## Photometric data



General uniform lighting - RS060B G2 LDNR LED5-36/840 PSR II WH

Light Distribution Diagram - RS060B G2 LDNR LED5-36/840 PSR II WH

