



Steel poles, spigot Ø: 76 mm

611893.004 | Accessories

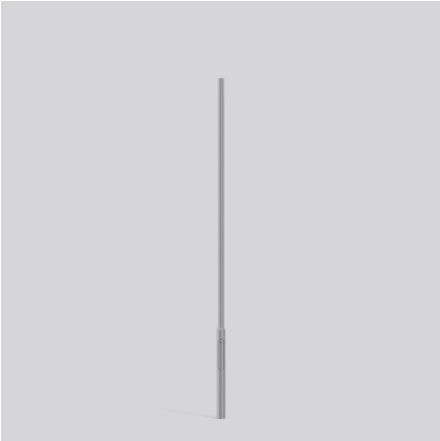

Accessories
4051859081296
D 114, H 4500

In-ground installation
silver, matt (approx. RAL 9006)

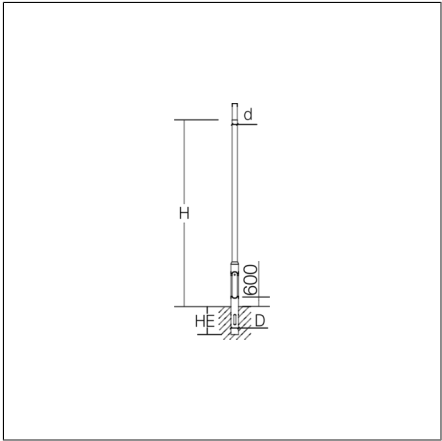

Cylindrical stepped pole made of steel according to DIN EN 40. Hot-dip galvanised in compliance with DIN EN ISO 1461. Wall thickness 3 mm. Flush pole door, 85 x 400 mm. Triangular lock, other locks on request. C-slot with two sliding nuts M6 and earthing thread M8. Cable hole 50 x 150 mm (UKK 500 mm below level).

Product specifications

Diameter D	114 mm
Height H	4500 mm
Installation space height HE	800 mm
Pole-top diameter	76 mm
Weight	34 kg
Conformity mark	CE, EAC


Accessories



982098.003
Edge guard for cable hole



982100.000
Mounting aid / protection against sinking 400x400



982566.003
Shrink sleeve



982099.000
Mounting aid / protection against sinking 300x300



61199.009
Fuse box