


RING OF FIRE

311570.004.76 | Pendant luminaires



Pendant luminaires
4010319993630
D 690, H 81

pendant
anodised aluminium

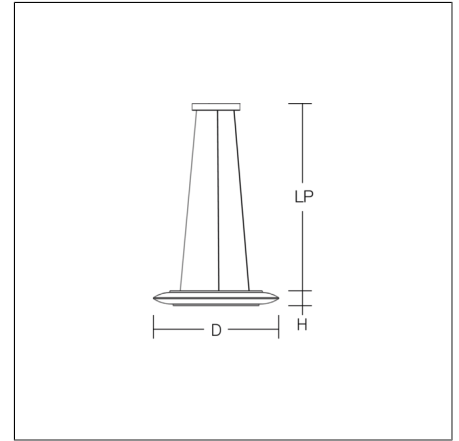

A uniquely shaped pendant luminaire with elliptical glass. Supporting ring made of anodised aluminium. Canopy aluminium anodised. Opal glass: mouth-blown, satin finish. Suitable for pendant. 3-point steel cable suspension, steplessly adjustable. Special lengths available on request. For pendant lengths of up to 2 m, power is supplied through a suspension cable. For pendant lengths of 2 m and more, power must be supplied through a separate cable. Converter integrated in the canopy. TouchDim sensor capable. Light and/or presence sensors can be integrated.

Product specifications

Diameter D	690 mm
Height H	81 mm
Suspension length LP	500-1200 mm
Weight	7.22 kg
Light source	LED
Colour temperature	3000 K
Rated luminous flux	4050 lm
System power	37 W
System efficiency	109 lm/W
Glare evaluation UGR (4H 8H)	22,5
Beam angle	down 114° up 113°
Rated life	50000 h (L80/B50)
Colour rendering index (CRI)	80
Colour tolerance	3
Photobiological safety according to EN 62471	Risk group 1
Driver	Converter, dimmable
Control	DALI
Voltage	220 - 240 V / 0 Hz, 50 Hz, 60 Hz
Luminaires on B10A fuse	12
Luminaires on B16A fuse	20
Inrush current / Inrush current duration	30 A / 200 µs
CIE Flux Code / CEN Flux Code	43 73 90 55 100
Type of protection	IP 20
Protection class	I
Filament test	960°C - 30 seconds
Impact resistance	IK02
Ambient temperature	25 °C
Conformity mark	CE, EAC

Spareparts



05-1936.002
Replacement glass