


GSUN 4

671820.002.2 | Luminaires for escape route identification



Ceiling and wall luminaires
4051859991403
L 344, B 144, H 148

Ceiling mounting, Wall (surface)
white

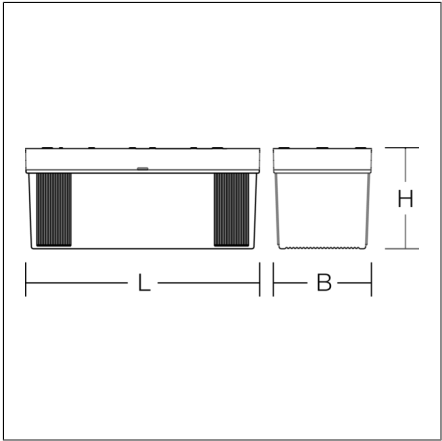

All-plastic luminaires, shockproof. For escape route identification. Base: plastic (polycarbonate). Diffuser: plastic (polycarbonate), opal. Suitable for Ceiling mounting, Wall (surface). Pendant luminaire also possible with accessories. Suitable for connection to central battery systems. 4 legends for escape route identification included.


Product specifications

Type of emergency lighting	Central battery system
Monitoring	Power circuit
Battery	without
Operating mode	maintained power mode
Viewing Distance	21 m
Length L	344 mm
Width B	144 mm
Height H	148 mm
Weight	0.82 kg
Light source	LED
Colour temperature	6500 K
Colour rendering index (CRI)	80
Driver	Converter
Control	on/off
Voltage	220 - 240 V / 0 Hz, 50 - 60 Hz
Luminaires on B10A fuse	17
Luminaires on B16A fuse	27
Luminaires on C10A fuse	28
Luminaires on C16A fuse	45
Inrush current / Inrush current duration	27 A / 250 µs
Type of protection	IP 54
Protection class	II
Ambient temperature for maintained power	-10 °C ... + 35 °C
Ambient temperature for non-maintained power mode	-10 °C ... + 35 °C
Conformity mark	CE

Accessories



981485.002
Wall mounting



90-4164.002
Suspension system



981583.002
Mounting kit for chains/cable suspensions



981167.002
Ball impact guard

GSUN 4

671820.002.2 | Luminaires for escape route identification



982763.000
Suspension cable set

Spareparts



08-671516.002
Replacement diffuser



991153
Motif foils