


FLAT POLYMERO

312097.002.1.76 | Pendant luminaires



Pendant luminaires
4051859370420
D 620, H 160

pendant
white

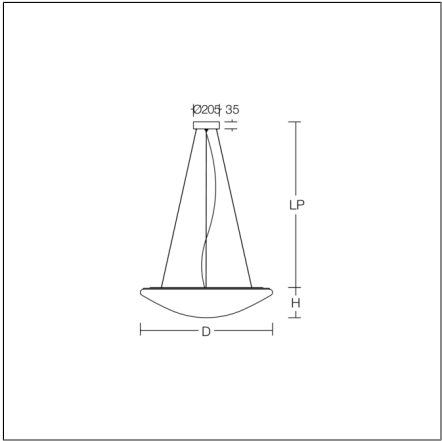

Decorative round LED pendant luminaire. Base and canopy: metal, powder-coated, white. Canopy Ø 205 mm, h 35 mm. Diffuser made of non-yellowing plastic (PMMA), opal. Diffuser fastening: patented push system. Suitable for pendant. 3-point steel cable suspension, steplessly adjustable. Special lengths available on request. TouchDim sensor capable. Light and/or presence sensors can be integrated.

Product specifications


Diameter D	620 mm
Height H	160 mm
Suspension length LP	350-1300 mm
Weight	7.68 kg
Light source	LED
Colour temperature	4000 K
Rated luminous flux	3800 lm
System power	38 W
System efficiency	100 lm/W
Glare evaluation UGR (4H 8H)	19,4
Beam angle	down 120° up 180°
Rated life	50000 h (L80/B10)
Colour rendering index (CRI)	83
Colour tolerance	3
Photobiological safety according to EN 62471	Risk group 1
Driver	Converter, dimmable
Control	DALI
Voltage	230 V / 50 - 60 Hz
Luminaires on B10A fuse	53
Luminaires on B16A fuse	85
Luminaires on C10A fuse	53
Luminaires on C16A fuse	85
Inrush current / Inrush current duration	0.2 A
CIE Flux Code / CEN Flux Code	40 69 88 85 100
Type of protection	IP 40
Protection class	I
Filament test	650°C - 30 seconds
Impact resistance	IK03
Ambient temperature	25 °C
Conformity mark	CE, EAC

FLAT POLYMERO

312097.002.1.76 | Pendant luminaires



Spareparts



08-311173.012
Replacement diffuser