


CENTRYXX W IP65

672304.002.1.89 | Stand-by luminaires for escape route illumination



Wall luminaires
4051859241096
L 79, B 198, H 198

Wall (surface)
white

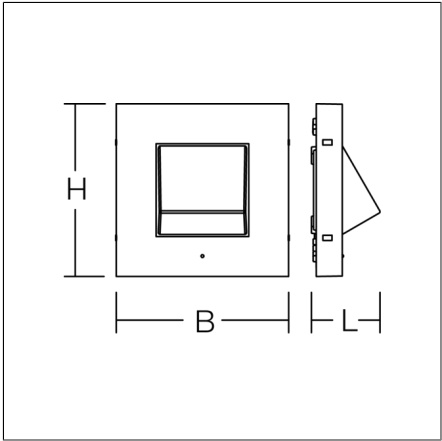

Wall luminaire for escape route illumination. Base: die-cast aluminium, powder-coated Cover: polycarbonate. With plastic lenses for area lighting. Vertical swivel. Driver integrated. Suitable for connection to central battery systems. With AC Control monitoring module for LUXI-FAIR central battery units. Luminaires with limited surface temperature in accordance with EN 60598-2-24 for use in environments in which a deposit of conductive dust on the luminaire can be expected.

Product specifications

Typ of emergency lighting	Central battery system
Monitoring	Luxifair AC-Control
Battery	without
Operating mode	maintained power mode
Length L	79 mm
Width B	198 mm
Height H	198 mm
Weight	0.85 kg
Light source	LED
Colour temperature	6500 K
Rated luminous flux, mains operation	470 lm
System power, mains operation	6,9 W
Rated luminous flux, emergency operation	470 lm
System power, emergency operation	6,6 W
System efficiency	68 lm/W
Glare evaluation UGR (4H 8H)	42
Beam angle	85°/53°/15°/53°
Rated life	50000 h
Colour rendering index (CRI)	70
Photobiological safety according to EN 62471	Risk group 2
Driver	Electronic ballast
Control	on/off
Voltage	220 - 240 V / 0 Hz, 50 Hz, 60 Hz
Luminaires on B10A fuse	18
Luminaires on B16A fuse	29
Luminaires on C10A fuse	36
Luminaires on C16A fuse	58
Inrush current / Inrush current duration	3.3 A / 400 µs
CIE Flux Code / CEN Flux Code	40 70 92 98 100
Type of protection	IP 65
Protection class	I
Filament test	850 °C
Impact resistance	IK08
Ambient temperature for maintained power	-10 °C ... + 40 °C
Ambient temperature for non-maintained power mode	-10 °C ... + 40 °C
Safety marks	D-mark
Conformity mark	CE

CENTRYXX W IP65

672304.002.1.89 | Stand-by luminaires for escape route illumination



Accessories



982274.002

Mounting set for through wiring surface installation