

Axyl Stride

THORN

96701595 AXYL STRIDE M SE 28L 930 A/S RD ANT

LED 10W AXYL_ST_M_AS930	IP65	IK08			
-------------------------	------	------	---	---	--


Axyl Stride

AXYL Stride, a wall mounted, architectural LED luminaire for decorative facade lighting, with asymmetrical distribution. Class III electrical.. DALI-2 dimmable Remote LED driver. , IP65, Impact strength: IK08. Housing: die-cast aluminium, powder coated textured anthracite. Working ambient temperature: -20°C to +50°C. Complete with 3000K LED..


Dimensions: 200 x 32 x 200 mm
Luminaire input power: 10.1 W
Luminaire luminous flux: 382 lm
Luminaire efficacy: 38 lm/W
Weight: 1.36 kg



TLG_AXYL_F_STRIDE_MED_ANT.jpg

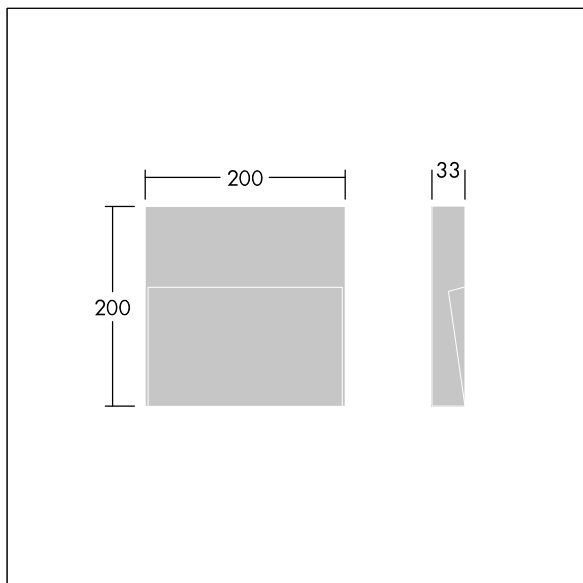

TLG_AXYL_M_STRIDE_M.wmf

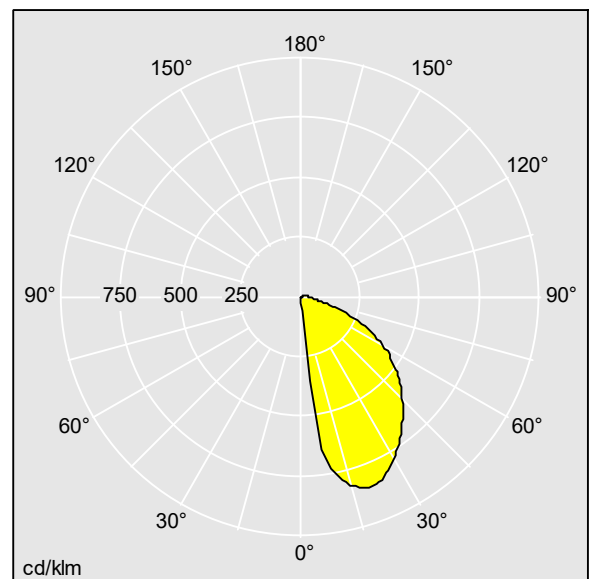

96701595.ltd

Lamp position: STD - standard
Light Source: LED
Luminaire luminous flux*: 382 lm
Luminaire efficacy*: 38 lm/W
Colour Rendering Index min.: 90
Correlated colour temperature*: 3000 Kelvin

Chromaticity tolerance (initial MacAdam): 3
Rated useful life (B10)*:
L80 70000 h at 25 °C
Ballast: 0x LED_DRV
Luminaire input power*: 10.1 W Power factor = 0.84
Dimming: Dali2Dim
LOR: 1,00 ULOR: 0,03 DLOR: 0,97

This product contains a light source of energy efficiency class C.

All values marked with an * are rated values. Thorn uses tried and tested components from leading suppliers, however there may be isolated instances of technology-related failures of individual LEDs during the rated product lifetime. International standards set the tolerance in initial flux and connected load at $\pm 10\%$. Unless stated otherwise, the values apply to an ambient temperature of 25°C.

Thorn Lighting is constantly developing and improving its products. The right is reserved to change specifications without prior notification or public announcement.
© Thorn Lighting