



FLAT BASIC

211427.002 | Ceiling and wall luminaires

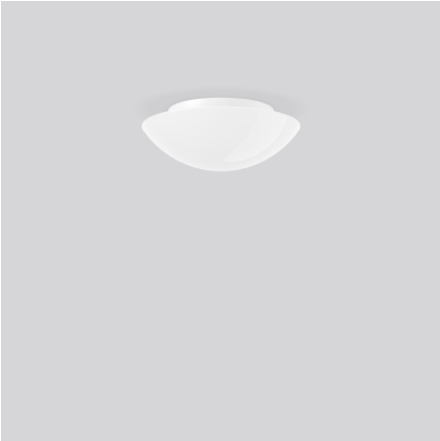

Ceiling and wall luminaires
4051859928195
D 300, H 106

Ceiling mounting, Wall (surface)
pure white (RAL 9010)

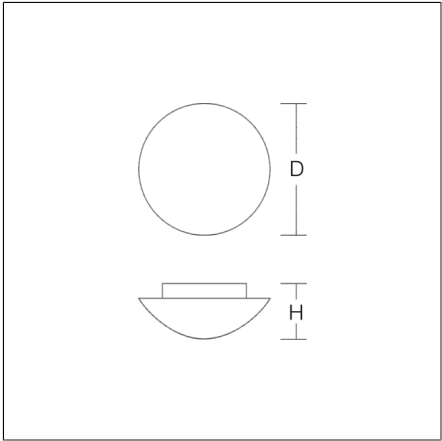

Decorative round surface-mounted luminaire. Base: plastic. Mouth blown 3-layer opal glass (Triplex glass) with satin finish. Diffuser fastening: spring system. Triplex glass produces particularly homogeneous, soft and glare free lighting. Suitable for Ceiling mounting, Wall (surface).

Product specifications

Diameter D	300 mm
Height H	106 mm
Weight	1.78 kg
Light source	LED
Colour temperature	3000 K
Rated luminous flux	1050 lm
System power	11 W
System efficiency	95 lm/W
Glare evaluation UGR (4H 8H)	18,9
Beam angle	down 120° up 180°
Rated life	72000 h
Colour rendering index (CRI)	80
Colour tolerance	3
Photobiological safety according to EN 62471	Risk group 1
Driver	Converter
Control	on/off
Voltage	220 - 240 V / 50 - 60 Hz
Luminaires on B10A fuse	17
Luminaires on B16A fuse	27
Luminaires on C10A fuse	28
Luminaires on C16A fuse	46
Inrush current / Inrush current duration	27 A / 250 µs
CIE Flux Code / CEN Flux Code	41 70 89 79 100
Type of protection	IP 43 ceiling mounting IP 44 wall mounting
Protection class	I
Filament test	960°C - 30 seconds
Impact resistance	IK02
Ambient temperature	25 °C
Conformity mark	CE