


DEECOS P micro

911489.003.2 | Pendant luminaires



Pendant luminaires
4051859739456
D 60, H 190

pendant
deep black, matt (RAL 9005)

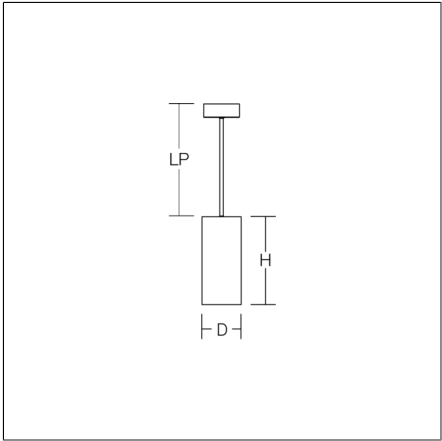


Cylindrical pendant luminaire. Housing: die-cast aluminium, powder-coated. Canopy made of powder-coated sheet steel with magnetic attachment. Optical assembly with reflector made of MIRO-Silver with 98% total light reflection for outstanding efficiency - can be changed without tools. Black plastic ring and recessed LED to prevent glare from the side. Best colour rendering index Ra>90. Transparent suspension cable 3 m, can be shortened. High quality converter without flickering and stroboscopic effect.

Product specifications

Diameter D	60 mm
Height H	190 mm
Suspension length LP	3000 mm
Weight	0.89 kg
Light source	LED
Colour temperature	4000 K
Rated luminous flux	1850 lm
System power	16 W
System efficiency	116 lm/W
Glare evaluation UGR (4H 8H)	20,8
Beam angle	38°
Rated life	50000 h (L80/B10)
Colour rendering index (CRI)	92
Colour tolerance	2
Photobiological safety according to EN 62471	Risk group 1
Driver	Converter
Control	on/off
Voltage	220 - 240 V / 50 Hz, 60 Hz
Luminaires on B10A fuse	21
Luminaires on B16A fuse	34
Luminaires on C10A fuse	35
Luminaires on C16A fuse	57
Inrush current / Inrush current duration	4.5 A / 65 µs
CIE Flux Code / CEN Flux Code	99 100 100 100 100
Type of protection	IP 20
Protection class	I
Filament test	650 °C
Impact resistance	IK06
Ambient temperature	-20 °C ... + 25 °C
Conformity mark	CE

Accessories

	982801.003 Anti-glare honeycomb louvre		982802.000 Diffuser, transparent
	982802.010 Diffuser, satinated		982803.003 Reflector spot
	982803.013 Reflector flood		982804.013 Medium lens
	982804.023 Wide flood lens		982805.003 Oval corridor lens
	982806.002 White plastic ring for reflector.		982807.002 White plastic ring for lens.