




Ceiling and wall luminaires
4051859724957
L 247, B 45, H 195

Ceiling mounting, Wall (surface)
silver, matt (approx. RAL 9006)

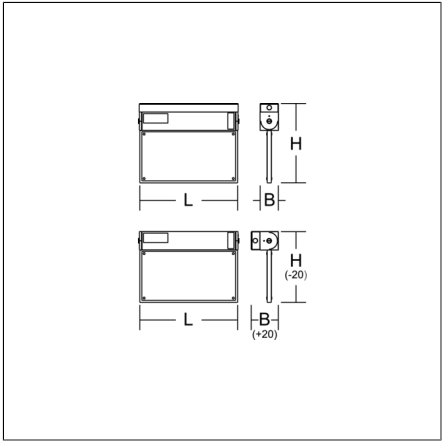

Luminaire for escape route identification. Housing: extruded aluminium profile, powder-coated. Includes 4 plastic foils with escape route motifs and 1 white plastic foil with mounting pins to attach them with. Universal mounting kit for ceiling and wall surface mounting. Electronic ballast included. Self-contained system with automatic self-test and feedback to the RZB monitoring system MULTIDIGIT.

Product specifications

Type of emergency lighting	Self-contained system
Monitoring	MultiDigit
Battery	NiMh
Duration	8 h
Operating mode	maintained power mode
Viewing Distance	24 m
Length L	247 mm
Width B	45 mm
Height H	195 mm
Weight	1 kg
Light source	LED
Colour temperature	4000 K
System power, mains operation	4,6 W
Photobiological safety according to EN 62471	Risk group 1
Driver	Electronic ballast
Control	on/off
Voltage	220 - 240 V / 50 - 60 Hz
Inrush current / Inrush current duration	0.12 A / 5000 µs
CIE Flux Code / CEN Flux Code	30 60 83 62 100
Type of protection	IP 30
Protection class	I
Filament test	650°C - 30 seconds
Impact resistance	IK03
Ambient temperature for maintained power	0 °C ... + 25 °C
Ambient temperature for non-maintained power mode	5 °C ... + 40 °C
Conformity mark	CE

Accessories



981780.004.1
Mounting kit for chains/cable suspensions



981883.004.1
Recessed mounting frame



981777.034.1
Suspension system



982763.000
Suspension cable set