

Technical data



IMQ approval: UL approval: CCC approval: EAC approval: EG605 E131787 2021000305000099 RU C-IT.YT03.B.00035/19 IEC 60947-5-1, IEC 60947-1, IEC 60204-1, EN ISO 14119, EN ISO 12100, IEC 60529, EN IEC 63000, BG-GS-ET-15, UL 508, CSA C22.2 No. 14. Approvals:

EN 60947-5-1, UL 508, CSA C22.2 No. 14, GB/T14048.5

Compliance with the requirements of:

Machinery Directive 2006/42/EC, EMC Directive 2014/30/EU, RoHS Directive 2011/65/EU.

Positive contact opening in conformity with standards: IEC 60947-5-1, EN 60947-5-1.

A If not expressly indicated in this chapter, for correct installation and utilization of all articles see the instructions given on pages 443 to 454.

Electrical data				Utilization category			
_	Thermal current (I _{th}): Rated insulation voltage (U _i):	10 A 500 Vac 600 Vdc	Alternating current: AC15 (50÷60 Hz)				
without connector	Rated impulse withstand voltage (U _{imp}):	400 Vac 500 Vdc (contact blocks 20, 21, 22, 33, 34) 6 kV	U _e (V) I _e (A)	250 6 urrent: DC	400 4	500 1	
wit	Conditional short circuit current: Protection against short circuits: Pollution degree:	4 kV (contact blocks 20, 21, 22, 33, 34) 1000 A acc. to EN 60947-5-1 type aM fuse 10 A 500 V 3	U _e (V) I _e (A)	24 3	125 0.55	250 0.3	
			Alternating current: AC15 (50÷60 Hz)				
with M12 con- nector, 4 and 5-pole	Thermal current (I,,):	4 A	U_ (V)	24	120	250	
n M12 cor nector, and 5-pole	Rated insulation voltage (U,):	250 Vac 300 Vdc	I (A)	4	4	4	
h M nec and	Protection against short circuits:	type gG fuse 4 A 500 V	Direct cu	urrent: DC	213		
ith 1 al	Pollution degree:	3	U _e (V)	24	125	250	
\$ `		0	I _e (A)	3	0.55	0.3	
with M12 con- nector, 8-pole			Alternating current: AC15 (50÷60 Hz)				
	Thermal current (I _{th}):	2 A	U _e (V)	24			
12 c tor, ole	Rated insulation voltage (U _i):	30 Vac 36 Vdc	ا _e (A)	2			
n M12 o nector, 8-pole	Protection against short circuits:	type gG fuse 2 A 500 V		urrent: DC	213		
, ith	Pollution degree:	3	U _e (V)	24			
\$			I _e (A)	2			





6

Features approved by IMQ

Rated insulation voltage (Ui):

Conventional free air thermal current (Ith): Protection against short circuits: Rated impulse withstand voltage (U_{imp}):

Protection degree of the housing: MV terminals (screw terminals) Pollution degree: Utilization category: Operating voltage (Ue): Operating current (Ie):

500 Vac 400 Vac (for contact blocks 2, 11, 12, 20, 21, 22, 28, 29, 30, 33, 34, 37) 10 A type aM fuse 10 A 500 V 6 kV

4 kV (for contact blocks 20, 21, 22, 28, 29, 30, 33, 34) IP67

AC15 400 Vac (50 Hz) 3 A

Features approved by UL

Electrical Ratings:

Environmental Ratings:

Q300 pilot duty (69 VA, 125-250 V dc) A600 pilot duty (720 VA, 120-600 V ac) Types 1, 4X, 12, 13

Use 60 or 75 °C copper (Cu) conductor and wire size range 12, 14 AWG, stranded or solid. The terminal tightening torque of 7.1 lb in (0.8 Nm). For FP series: the hub is to be connected to the conduit before the hub is connected to the enclosure.

Please contact our technical department for the list of approved products.

Forms of the contact element: Za, Za+Za, X+X, Zb, Y+Y, Y+Y+X, Y+Y+Y, Y+X+X, Y, X. Positive opening of contacts on contact blocks 5, 6, 7, 8, 9, 11, 13, 14, 16, 17, 18, 19, 20, 21, 22, 28, 29, 30, 33, 34, 37, 38, 39, 66.

In compliance with standards: EN 60947-1, EN 60947-5-1, fundamental requirements of the Low Voltage Directive 2014/35/EU.

Please contact our technical department for the list of approved products.


Description

These switches are used on machines where the hazardous conditions remain for a while, even after the machine has been switched off, for example because of mechanical inertia of the pulleys, saw disks, mills. This switch has its ideal application where the guard is not opened frequently and the installation of a switch with solenoid would be too expensive.



These switches are considered interlocks with guard locking in accordance with ISO 14119, and the product is marked on the side with the symbol shown.

Head and knobs with variable orientation



of protection is required for the housing.

Holding force of the unlocked actuator

The head can be quickly turned to each of the four sides of the switch by unfastening the two fastening screws.

The mechanical delay device can be rotated in 90° steps as well. This enables the switch to assume 32 different configurations.

These devices are designed to be used under the

toughest environmental conditions, and they pass the IP67 immersion test acc. to EN 60529. They

The inside of each switch features

a device which holds the actuator in

its closed position. Ideal for all those

applications where several guards

are unlocked simultaneously, but only

one is actually opened. The device


keeps all the unlocked guards in their

position with a retaining force of

approx. 30 N, stopping any vibrations or gusts of wind from opening them.

can therefore be used in all environments where the maximum degree

Adjustment range



The actuation head of this switch features a wide range of travel. In this way the guard can oscillate along the direction of insertion (4.5 mm) without causing unwanted machine shutdowns. This wide range of travel is available in all actuators in order to ensure maximum device reliability.

Contact block



Contact blocks with captive screws, finger protection, twin bridge contacts and double interruption for higher contact reliability. Available in multiple versions with shifted, simultaneous or overlapping actuation paths. They are suitable for many different applications.

Extended temperature range



These devices are also available in a special version suitable for an ambient operating temperature range from -40°C up to +80°C.


They can therefore be used for applications in cold stores, sterilisers and other equipment with low temperature environments. The special materials used to produce these versions retain their characteristics even under these conditions, thereby expanding the installation possibilities.

Laser engraving



All devices are marked using a dedicated indelible laser system. These engravings are therefore suitable for extreme environments too. Thanks to this system that does not use labels, the loss of plate data is prevented and a greater resistance of the marking is achieved over time.


Safety screws for actuators




As required by EN ISO 14119, the actuator must be fixed immovably to the guard frame. Pan head safety screws with one-way fitting are available for this purpose. With this screw type, the actuators cannot be removed or tampered by using common tools. See accessories on page 419.

Operation (FP 6R2-M2F1)

The switch is fastened to the machine body (A), while the stainless steel actuator is fastened to the guard (B). Once installed, the switch will firmly lock the actuator. In order to remove the actuator, the knob (C) has to be rotated. On the first turns the electrical contacts will positively open, then, after about 20 seconds (or 10 seconds depending on the version), the actuator will be released. In order to close the guard, the knob must be rotated in the opposite direction. This switch doesn't need power supply or timer and can be easily installed on old machines without important changes in their electrical circuit. The knob (C) may be supplied in a short (standard) or in a long version.

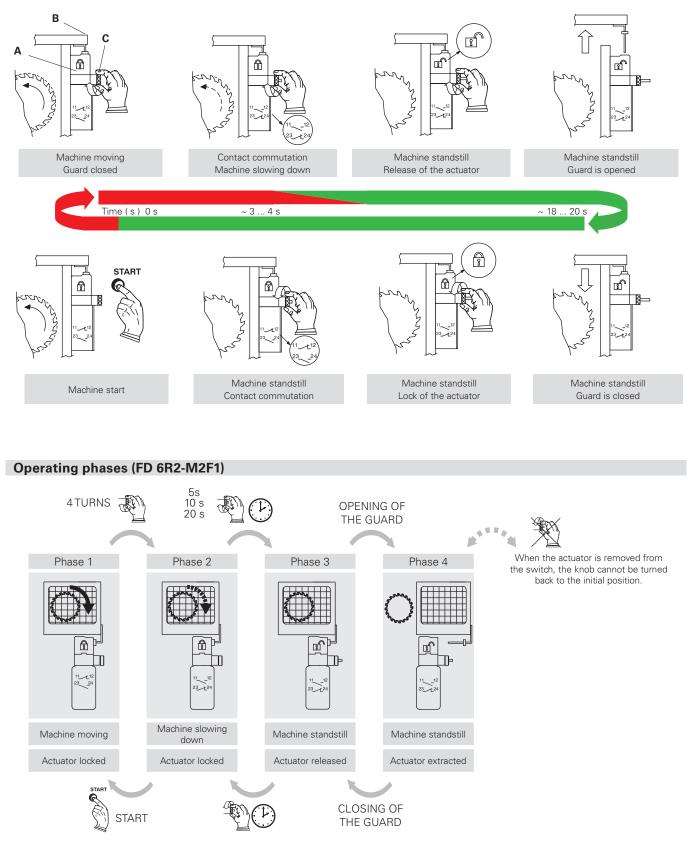


6

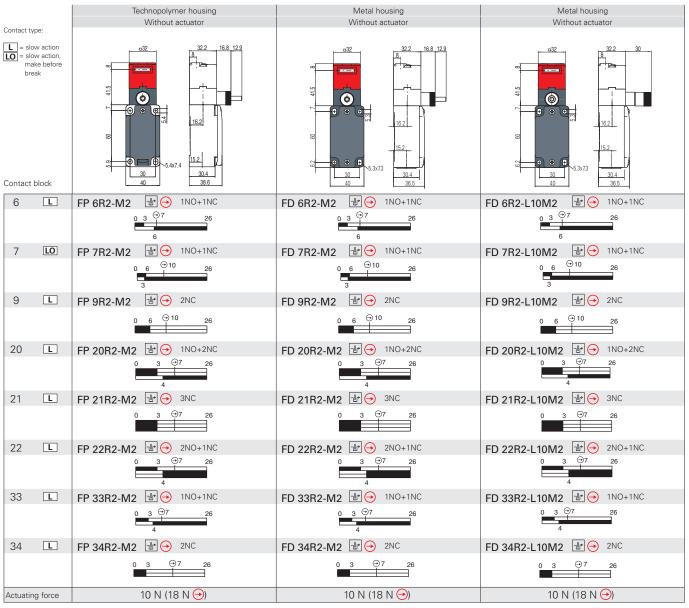

All values in the diagrams are in turns of the knob

Legend: 🕀 With positive opening according to EN 60947-5-1, 🕁 interlock with lock monitoring acc. to EN ISO 14119

How to read travel diagrams



IMPORTANT:

All values in the diagrams are in turns of the knob

The state of the NC contact refers to the switch with inserted actuator and with the knob turned anti-clockwise up to the end of the travel. Forinstallation in safety applications, actuate the switch at least up to the positive opening travel shown in the travel diagrams with symbol \bigcirc . Actuate the switch at least with the positive opening force, reported in brackets below each article, next to the actuating force value.

Limits of use

Do not use where dust and dirt may penetrate in any way into the head and deposit there. Especially not where powder, shavings, concrete or chemicals are sprayed. Adhere to the EN ISO 14119 requirements regarding low level of coding for interlocks. Do not use in environments with presence of explosive or flammable gas. In these cases, use ATEX products (see dedicated Pizzato catalogue).

Attention! These switches alone are not suitable for applications where operators may physically enter the dangerous area, because an eventual closing of the door behind them could restart the machine operation. In these cases, the maintenance personnel must use the actuator entry locking device VF KB1 shown on page 114.


All values in the drawings are in mm


Accessories See page 419


Stainless steel actuators

6


IMPORTANT: These actuators can be used only with items of the FD, FP, FL, FC and FS series (e.g. FD 6R2-M2). Low level of coding acc. to EN ISO 14119.






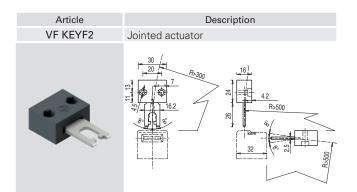

The actuator can flex in four directions for applications where the guard alignment is not precise.



Actuator adjustable in one direction for guards with reduced dimensions.




Actuator adjustable in two directions for guards with reduced dimensions.


🕩 pizzato

Universal actuator VF KEYF8

IMPORTANT: These actuators can be used only with items of the FD, FP, FL, FC and FS series (e.g. FD 6R2-M2). Low level of coding acc. to EN ISO 14119.



Jointed actuator for guards with poor alignment, adjustable in two dimensions for small doors; can be mounted in various positions. The metal fixing body has two pairs of bore holes; it is provided for rotating the working plane of the actuator by 90°.

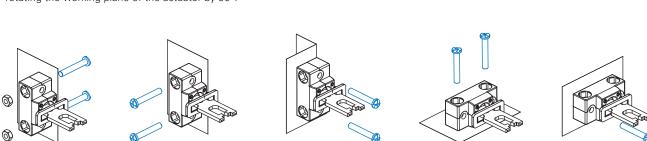

Accessories

Article	Description	
VF KB1	Lock out device	
	Padlockable lock out device to prevent the actuator entry and the accidental closing of the door behind operators while they are in the danger area. Hole diameter for padlocks: 9 mm.	

