

Cesar Jazz

THORN

96700249 CESAR JAZZ 4W 360 1L 930NB HF ANT

LED 18W CESA_JAZZ_930_4W	IP65	IK10	⚡	CE	
--------------------------	------	------	---	----	--


Cesar Jazz

Cesar Jazz a wall mounted, architectural LED luminaire for decorative facade lighting, 4 window, narrow beam distribution. Fixed output LED driver. Class I electrical, IP65, Impact strength: IK10. Housing: die-cast aluminium, powder coated anthracite. Working ambient temperature: -20°C to +40°C. Complete with 3000K LED.


Dimensions: Ø180 x 180 mm
 Luminaire input power: 18.1 W
 Luminaire luminous flux: 312 lm
 Luminaire efficacy: 17 lm/W
 Weight: 3.58 kg



TLG_CESA_F_JAZZ_ANT.jpg

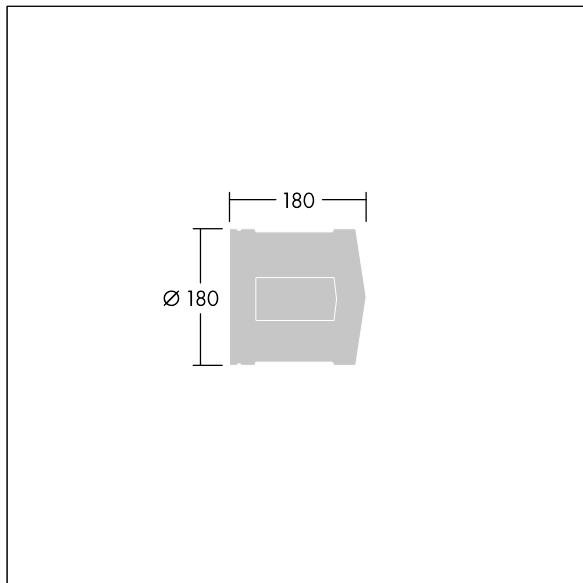

TLG_CESA_M_JAZZ_M_360.wmf

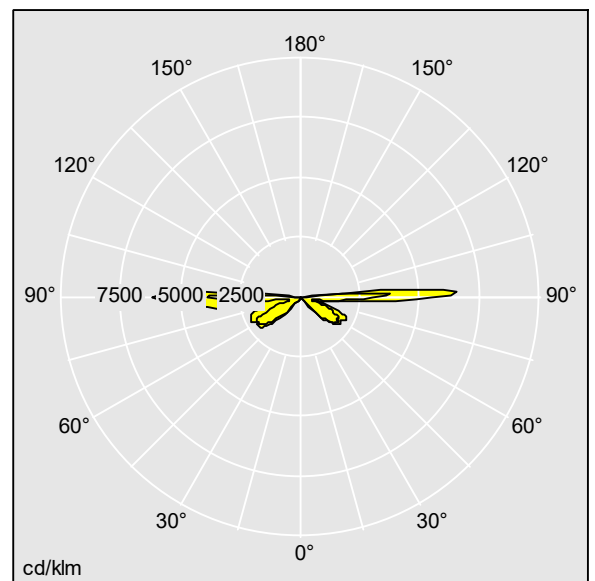

96700249.idt

Lamp position: STD - standard
 Light Source: LED
 Luminaire luminous flux*: 312 lm
 Luminaire efficacy*: 17 lm/W
 Colour Rendering Index min.: 90
 Correlated colour temperature*: 3000 Kelvin

Chromaticity tolerance (initial MacAdam): 3
 Rated useful life (B10)*:
 L80 70000 h at 25 °C
 Ballast: 1x LED_DRV
 Luminaire input power*: 18.1 W
 Dimming: FIX
 LOR: 1,00 ULOR: 0,18 DLOR: 0,82

This product contains a light source of energy efficiency class F.

All values marked with an * are rated values. Thorn uses tried and tested components from leading suppliers, however there may be isolated instances of technology-related failures of individual LEDs during the rated product lifetime. International standards set the tolerance in initial flux and connected load at $\pm 10\%$. Unless stated otherwise, the values apply to an ambient temperature of 25°C.

Thorn Lighting is constantly developing and improving its products. The right is reserved to change specifications without prior notification or public announcement.
 © Thorn Lighting