

PRODUCT DATASHEET

LN INV D 1200 P 40W 940 DAVR SN WT

LINEAR INDIVILED DIRECT 1200 DALI SENSOR | Surface mounted luminaire for single or light line office application with CRI90 and DALI sensor, 1200 mm



Areas of application

- Direct replacement for luminaires with fluorescent lamps
- Offices, education, public buildings
- Single and continuous line configuration
- Direct lighting

Product benefits

- Easy upgradeability of light source and driver (EVERLOOP design)
- Homogenous light distribution and reduced glare ($UGR \leq 19$) thanks to IndiviLED® optics
- High performance with CRI90 and up to 131 lm/W
- IoT-ready luminaire with DALI-2 driver, suitable for VIVARES and other Light Management Systems
- Symmetric and asymmetric light distribution for various application areas
- Extended services such as energy monitoring and remote maintenance possible with DALI versions
- High color consistency with SDCM 3
- Easy installation
- Low flicker light thanks to special electronic control gear
- Suitable for battery emergency installations acc. to EN 60598-2-22
- Multiple mounting options thanks to different accessories

Product features

- Minimalistic LEDVANCE SCALE design in extruded aluminum housing, available in white and black color



- Includes EVERLOOP: Convenient replacement of light source and LED driver
- PIR-Sensor with leader-follower function
- Combined daylight and motion detection
- Individual adjustment of the parameters with configuration software or remote control
- Linkable into seamless light line with accessories (surface or pendant mounting)
- Pendant mounting with suspension kit (to be ordered separately)
- Glow Wire Test according to IEC 60695-2-12: 850 °C
- 5-pole terminal block, cable cross section up to 5 x 2.5 mm²
- Lifetime (L80/B10): 70,000 h (at 25 °C)


TECHNICAL DATA

Electrical data


Nominal wattage	40 W / 34 W / 30 W / 25 W
Nominal voltage	220...240 V
Mains frequency	0/50/60 Hz
Nominal current	177...160...140...120 mA
Inrush current	9.92 A
Inrush current time T_{h50}	40 μ s
Max. number of luminaires per miniature circuit breaker B16	20
Max. number of luminaires per miniature circuit breaker C10	20
Max. number of luminaires per miniature circuit breaker C16	22
Power factor λ	≥ 0.90
Total harmonic distortion	≤ 20 %
Protection class	I
Operating mode	Integrated LED driver
Dimming interface	DALI-2 / IoT

Photometrical data

Luminous flux	5050 lm / 4450 lm / 3850 lm / 3250 lm
Luminous efficacy	126 lm/W / 131 lm/W / 128 lm/W / 130 lm/W
Color temperature	4000 K
Light color (designation)	Cool White
Color rendering index Ra	> 90
Standard deviation of color matching	< 3 sdc _m
Low flicker	Yes
Flickering metric (Pst LM)	≤ 1
Stroboscope effect metric (SVM)	≤ 0.4
Photobiological safety group acc. to EN62778	RG0
Photobiological safety group acc. to EN62471	RG0
Beam angle	90 °
UGR	< 19

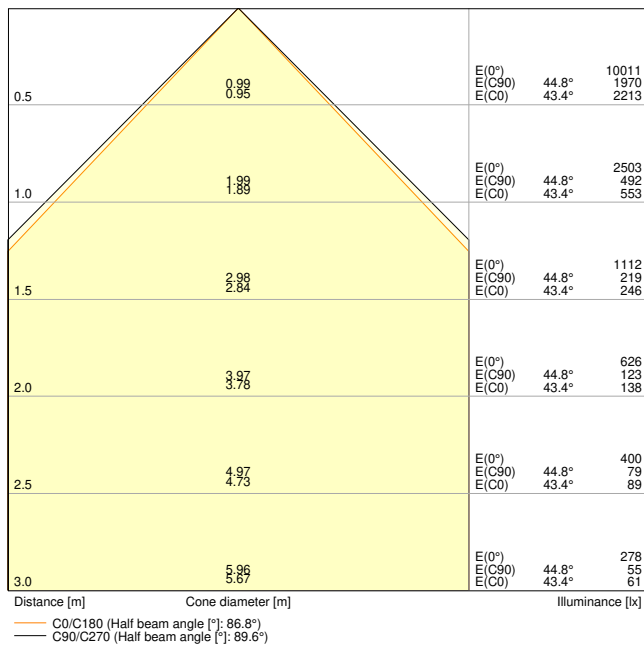


LN INV D 1200 P 40W 940 DAVR SN WT

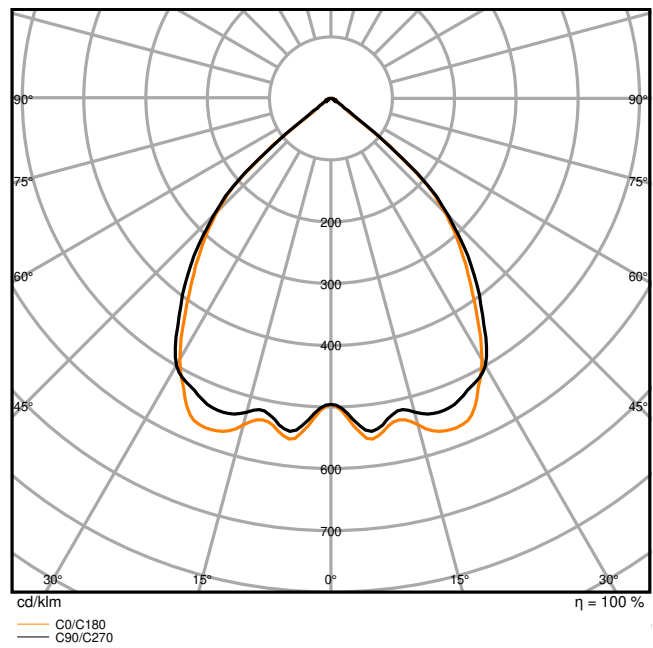

LN INV D 1200 P 40W 940 DAVR SN WT

Dimensions & Weight

Length	1210.00 mm
Width	125.00 mm
Height	43.00 mm
Product weight	3290.00 g



LN INV 1200 P

Materials & Colors

Product color	White
Housing color	White
Body material	Aluminum
Cover material	Polymethylmethacrylate (PMMA)
Light emitting surface material	Polymethylmethacrylate (PMMA)
Glow Wire Test according to IEC 60695-2-12	850 °C
Mercury content	0.0 mg

Application & Mounting

Ambient temperature range	-20...+50 °C
Temperature range at storage	-20...+80 °C
Type of connection	Screwless terminal, 5-Pole (L, N, PE, DA+, DA-)
Type of protection	IP20
Protection class IK (shock resistance)	IK06
Dimmable	Yes
Type of dimming	DALI2
Mounting type	Suspended/Surface
Mounting location	Ceiling
Application environment	Indoor
Adjustable	No
With light source	Yes

Lifespan

Lifespan L70/B50 at 25 °C	100000 h ¹⁾
Lifespan L80/B10 at 25 °C	70000 h ¹⁾
Lifespan L80/B50 at 25 °C	70000 h
Lifespan L90/B10 at 25 °C	35000 h
Number of switching cycles	25000

¹⁾ t[h]: L70 / B50 @ 25 °C (Ta), t[h]: L80 / B10 @ 25 °C (Ta), t[h]: L90 / B10 @ 25 °C (Ta)

Control gear

Output current	1400 mA
ECG - Output ripple current	≤ 3 %
Recommended control gear	OSRAM type OTI DALI 50/220-240/1A4 NFC L

Sensor

Type of sensor	Motion / Light
Sensor technology	Passive infrared/Photocell
Sensor detection angle	80 °
Sensor controlled switching time	10 s ... 30 min
Detection range of motion sensor	1.7 m ... 4 m


Certificates & Standards



Standards	CE / CB / ENEC / TÜV SÜD / UKCA / EAC
Luminaire with limited surface temperature, "D sign"	No
Ball shot safe	No
Replaceable light source (EPREL)	By the end consumer

Additional product data

Added function	EVERLOOP / VIVARES / Programmable Multi Lumen
----------------	---

Accessories Optional







Product image	Product name	EAN
	LN INV CORNER CONNECTOR WT	4099854214905
	LN INV SUSPENSION WIRE	4099854215551
	LN INV 1200 THROUGHWIRING KIT	4099854214820
	LN INV INFILL 1500 WT	4099854214844
	LN INV INFILL 600 WT	4099854214882
	LN INV INFILL 1200 WT	4099854214868




Product image	Product name	EAN
	LN INV INLINE CONNECTOR	4099854215612
	LN INV SUSPENSION KIT WT	4099854215537








EQUIPMENT / ACCESSORIES

- Suspension kit available for pendant luminaire version (to be ordered separately)
- Inline, corner and infill connectors available as separate accessory
- Through-wiring cable kit available

DOWNLOAD DATA

Documents and certificates	Document name
 User instruction / safety instructions	LN INV P DAVR SN
 Legal information	Legal Insert LN INV P DA
 Legal information	LSI LN INV DA
 Declarations of conformity	LN INV
 Declarations of conformity UKCA	LN INV
 Certificates	LN INV

Photometric and lighting design files	Document name
 IES file (IES)	LN INV D 1200 P 40W 940 DAVR SN WT
 LDT file (Eulumdat)	LN INV D 1200 P 40W 940 DAVR SN WT
 ULD file (DIALux)	LN INV D 1200 P 40W 940 DAVR SN BK

Photometric and lighting design files		Document name
	ROLF file (RELUX)	LN INV D 1200 P 40W 940 DAVR SNWT
	UGR file (UGR table)	LN INV D 1200 P 40W 940 DAVR SN WT
	Light distribution curve type cone	LN INV D 1200 P 40W 940 DAVR SN WT
	Light distribution curve type polar	LN INV D 1200 P 40W 940 DAVR SN WT
CAD/BIM files		Document name
	BIM Revit 3D	Linear Indiviled G2
	CAD STEP 3D	LN INV D 1200 G2
Tender texts	Document name	
	Tender documents	LINEAR INDIVILED DIRECT 1200 DALI SENSOR P 40W 940 DAVR SN WT-EN



LOGISTICAL DATA

Product code	Packaging unit (Pieces/Unit)	Dimensions (length x width x height)	Gross weight	Volume
4099854249273	Folding box 1	178 mm x 1,263 mm x 103 mm	3890.00 g	23.16 dm ³
4099854249280	Shipping box 2	1,297 mm x 197 mm x 224 mm	9180.00 g	57.23 dm ³

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

ADDITIONAL CATALOG INFORMATION

LINEAR IndivILED® DIRECT DALI SN WT	DRIVER	mA	W	lm	lm/W	IP
LN INV D 1200 P 40W 930 DAVR SN WT	OSRAM	500	25	3100	124	MFC
	GTI DALI SV	800	30	3700	123	MFC
	225-28V	500	30	4200	140	MFC
LN INV D 1200 P 40W 940 DAVR SN WT	OSRAM	500	25	3200	128	MFC
	GTI DALI SV	800	30	3800	126	MFC
	225-28V	500	30	4300	143	MFC
LN INV D 1500 P 52W 930 DAVR SN WT	OSRAM	800	38	4200	110	MFC
	GTI DALI SV	800	45	5400	120	MFC
	225-28V	875	48	6000	125	MFC
LN INV D 1500 P 52W 940 DAVR SN WT	OSRAM	800	38	5200	130	MFC
	GTI DALI SV	800	45	6400	142	MFC
	225-28V	875	48	7000	145	MFC

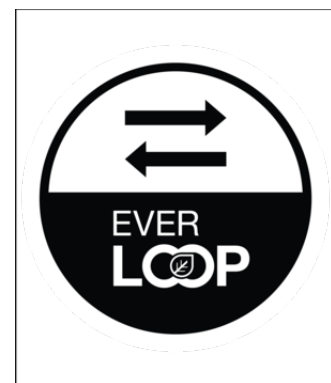

References / Links

– For Guarantee see www.ledvance.com/guarantee

DISCLAIMER

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.