


DEECOS S mini

742197.004.1 | Surface mounted projector



Surface mounted projectors
4051859818779
D 87, H 214

Track on ceiling, Wall track
silver

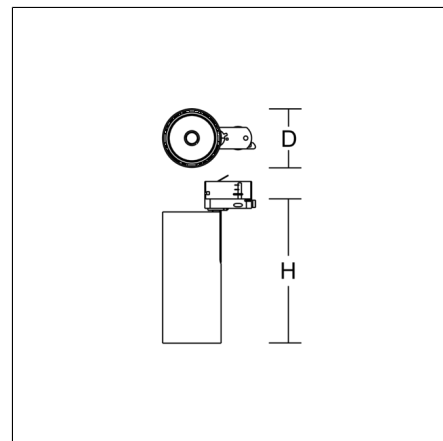

LED surface-mounted projector in modern design with no visible cooling ribs. Housing: die-cast aluminium, powder-coated. Rotation range: 356°. Swivel range: 90°. Black plastic ring and recessed LED to prevent glare from the side. Optical assembly with reflector made of MIRO-Silver with 98% total light reflection for outstanding efficiency - can be changed without tools. Best colour rendering index Ra>90. With multi adaptor for 3-circuit tracks 230 V. Suitable for Track on ceiling, Wall track. High quality converter without flickering and stroboscopic effect. The following accessories can be mounted without use of tools: interchangeable lenses, decorative glasses, honeycomb louvre, clear and frosted diffusers, white interchangeable plastic ring.

Product specifications


Diameter D	87 mm
Height H	214 mm
Weight	1.15 kg
Light source	LED
Colour temperature	4000 K
Rated luminous flux	2750 lm
System power	20 W
System efficiency	138 lm/W
Glare evaluation UGR (4H 8H)	20,9
Beam angle	60°
Rated life	50000 h (L90/B10)
Colour rendering index (CRI)	92
Colour tolerance	2
Photobiological safety according to EN 62471	Risk group 1
Driver	Converter
Control	on/off
Voltage	220 - 240 V / 50 Hz, 60 Hz
Luminaires on B10A fuse	21
Luminaires on B16A fuse	34
Luminaires on C10A fuse	35
Luminaires on C16A fuse	57
Inrush current / Inrush current duration	9.92 A / 230 µs
CIE Flux Code / CEN Flux Code	95 99 100 100 100
Type of protection	IP 20
Protection class	I
Filament test	650 °C
Impact resistance	IK06
Ambient temperature	-20 °C ... + 25 °C
Conformity mark	CE, EAC

DEECOS S mini

742197.004.1 | Surface mounted projector




Accessories




982370.000
Diffuser, transparent




982370.010
Diffuser, satinated




982371.003
Anti-glare honeycomb louvre



982369.003
Spot lens



982369.013
Medium lens



982369.023
Flood lens



982421.002
White plastic ring for lens.




982368.003
Reflector spot




982368.013
Reflector medium



982368.023
Reflector flood



982369.033
Wide flood lens



982369.043
Oval corridor lens



982419.002
White plastic ring for reflector.



982368.033
Reflector wide flood



982647.002
Decorative glass opal matt



982648.002
Decorative glass opal matt



70319.009
Point outlet for 3-circuit multi adaptor