

Modular Signal Towers / KombiSIGN 72

TwinFLASH Design 24VDC GN



Part No.:	647.240.55		c(UL)us	L	
Series:	KombiSIGN 72		7	c QL) us	

MECHANICAL DATA		
Height	66 mm	
Diameter	70 mm	
Materials	PC	
Dome colour	Clear	
Protection category	IP65	
Working temperature minimum	-30°C	
Working temperature maximum	+60°C	
Weight with packaging	91 g	
Product weight	77 g	

ELECTRICAL DATA		
Operating voltage	24V	
Operating voltage type	DC	
Operating voltage tolerance	+/- 10%	
Rated operational voltage	24 VDC	
Rated operational current	80 mA	
Rated inrush current	750 mA	
Protection class	Protection class 2	
Pollution degree	3	

OPTICAL DATA			
Light source	LED		
Light colour	Green		
Optical signal image	EVS Flash TwinFlash		
Flash frequency	1 Hz		
Service life optical	50,000 h maximum		

APPROVAL DATA	
Conforms with CE	Yes
Conforms with RoHS directive	Yes
WEEE	Yes
Conforms with ATEX-directive	No
Conforms with CCC	No
Conforms with UL	cULus
UL Type Rating	Type 12
Conforms with FCC	No
Conforms with IC	No
EAC certificate available	Yes

For additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.




Modular Signal Towers / KombiSIGN 72

TwinFLASH Design 24VDC GN

Conforms with UKCA (Importer)	Yes (WERMA (UK) Ltd.)	
Conforms with CMIM	No	
Conforms with AS-I	No	
ICAO Certification	No	
Conforms with DNV	No	
Conforms with RoHS CN	No	
Conforms with VdS	No	
MTTF-value [years]	1625	

DRAWING

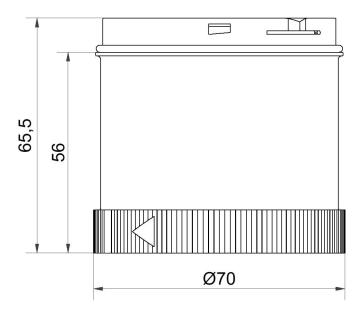

For additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.