


DEECOS S maxi

742224.003.3 | Surface mounted projector



Surface mounted projectors
4051859852742
D 123, H 200

Track on ceiling, Wall track
deep black, matt (RAL 9005)

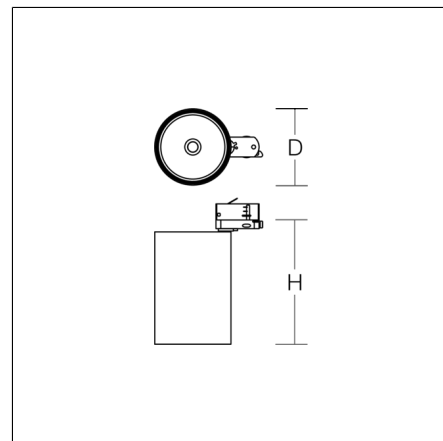

LED surface-mounted projector in modern design with no visible cooling ribs. Housing: die-cast aluminium, powder-coated. Rotation range: 356°. Swivel range: 90°. Black plastic ring and recessed LED to prevent glare from the side. Optical assembly with lens made of plastic (polycarbonate) for the best homogeneous light distribution - can be changed without tools. Best colour rendering index Ra>90. With multi adaptor for 3-circuit tracks 230 V. Suitable for Track on ceiling, Wall track. High quality converter without flickering and stroboscopic effect. The following accessories can be mounted without use of tools: interchangeable lenses, decorative glasses, honeycomb louvre, clear and frosted diffusers, white interchangeable plastic ring.

Product specifications

Diameter D	123 mm
Height H	200 mm
Weight	1.46 kg
Light source	LED
Colour temperature	3500 K
Rated luminous flux	3750 lm
System power	35 W
System efficiency	107 lm/W
Glare evaluation UGR (4H 8H)	12,2
Beam angle	13°
Rated life	50000 h (L90/B10)
Colour rendering index (CRI)	92
Colour tolerance	2
Photobiological safety according to EN 62471	Risk group 1
Driver	Converter
Control	on/off
Voltage	220 - 240 V / 50 Hz, 60 Hz
Luminaires on B10A fuse	21
Luminaires on B16A fuse	34
Luminaires on C10A fuse	35
Luminaires on C16A fuse	57
Inrush current / Inrush current duration	12.6 A / 250 µs
CIE Flux Code / CEN Flux Code	97 100 100 100 100
Type of protection	IP 20
Protection class	I
Filament test	650 °C
Impact resistance	IK06
Ambient temperature	-20 °C ... + 25 °C
Conformity mark	CE, EAC

DEECOS S maxi

742224.003.3 | Surface mounted projector




Accessories



982373.003
Spot lens



982373.023
Flood lens



982374.000
Diffuser, transparent



982422.002
White plastic ring for lens.



982372.013
Reflector medium



982372.033
Reflector wide flood




982649.002
Decorative glass opal matt



70319.003
Point outlet for 3-circuit multi adaptor



982373.013
Medium lens



982375.003
Anti-glare honeycomb louvre



982374.010
Diffuser, satinated



982372.003
Reflector spot



982372.023
Reflector flood



982420.002
White plastic ring for reflector.



982650.002
Decorative glass opal matt