



Ceasr Opera, walk over

96701703 CESAR OPERA S WO 1L 930 WB RD ANT


THORN

LED 2W CESA_OP_S_WB_930 IP67 IK09  


Ceasr Opera, walk over

Ceasr Opera, walk over a floor recessed, architectural LED luminaire for decorative facade lighting, wide beam distribution. DALI-2 dimmable Remote LED driver. Class III electrical, IP67, Impact strength: IK09. Housing: die-cast aluminium, powder coated anthracite. Working ambient temperature: -20°C to +50°C. Complete with 3000K LED.


Dimensions: Ø120 x 120 mm
Luminaire input power: 2.2 W
Luminaire luminous flux: 20 lm
Luminaire efficacy: 9 lm/W
Weight: 0.57 kg

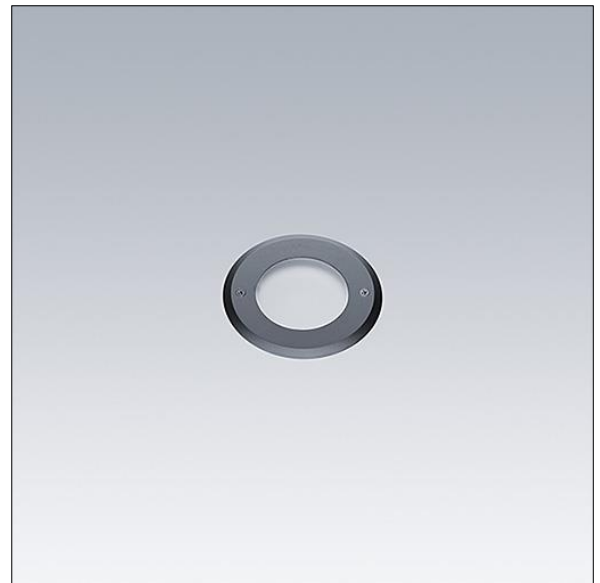

TLG_CESA_F_OPERA_S_WO_WB_ANT.jpg

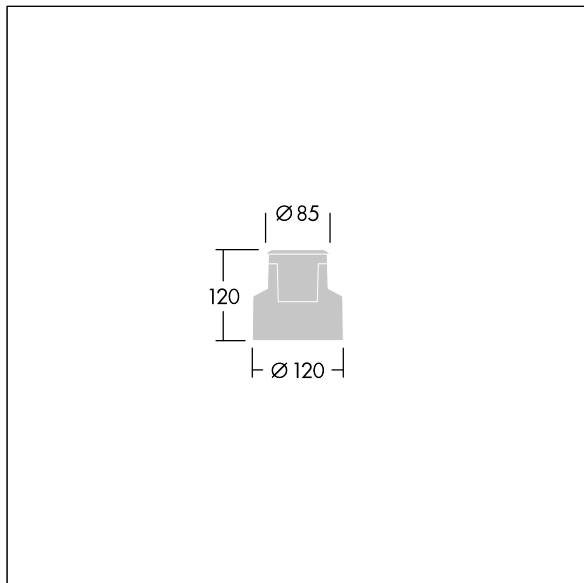

TLG_CESA_M_OPERA_S_WO.wmf

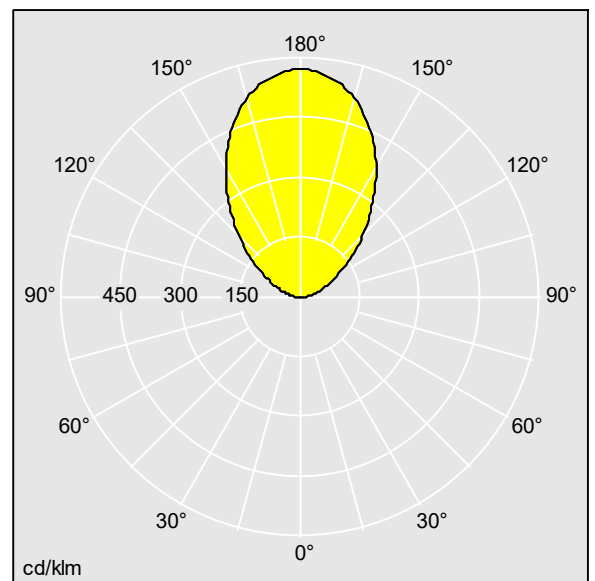

96701703.ltd

Lamp position: STD - standard
Light Source: LED
Luminaire luminous flux*: 20 lm
Luminaire efficacy*: 9 lm/W
Colour Rendering Index min.: 90
Correlated colour temperature*: 3000 Kelvin

Chromaticity tolerance (initial MacAdam): 3
Rated useful life (B10)*:
L80 70000 h at 25 °C
Ballast: 0x LED_DRV
Luminaire input power*: 2.2 W
Dimming: Dali2Dim
LOR: 1,00 ULOR: 1,00 DLOR: 0,00

This product contains a light source of energy efficiency class E.

All values marked with an * are rated values. Thorn uses tried and tested components from leading suppliers, however there may be isolated instances of technology-related failures of individual LEDs during the rated product lifetime. International standards set the tolerance in initial flux and connected load at $\pm 10\%$. Unless stated otherwise, the values apply to an ambient temperature of 25°C.

Thorn Lighting is constantly developing and improving its products. The right is reserved to change specifications without prior notification or public announcement.
© Thorn Lighting