




Wall luminaires  
4051859928850  
L 320, B 160, H 59

Wall (surface)  
white

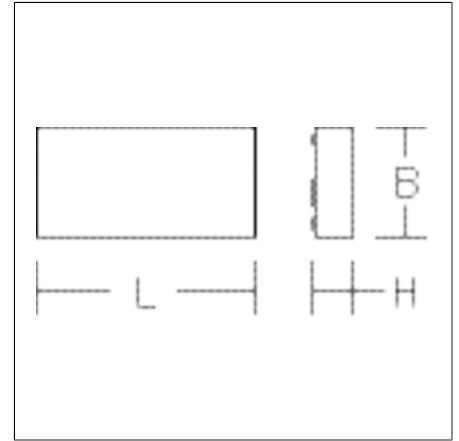

Attractive escape sign luminaire. Housing and end caps made of sheet steel, powder coated. End caps with hidden screws, with permanently dimensionally stable silicone foam seal. Rectangular diffuser made of non-yellowing plastic (PMMA), opal. Suitable for Wall (surface). Self-contained system with automatic self-test and feedback to the RZB monitoring system MULTIDIGIT. 4 legends for escape route identification included. Luminaires with limited surface temperature in accordance with EN 60598-2-24 for use in environments in which a deposit of non-conductive dust on the luminaire can be expected.

### Product specifications

Typ of emergency lighting	Self-contained system
Monitoring	MultiDigit
Battery	LiFePO4
Duration	8 h
Operating mode	maintained power mode
Viewing Distance	30 m
Length L	320 mm
Width B	160 mm
Height H	59 mm
Weight	1.5 kg
Light source	LED
Colour temperature	4000 K
System power, mains operation	3,1 W
Rated life	50000 h
Colour rendering index (CRI)	80
Photobiological safety according to EN 62471	Risk group 1
Driver	Converter
Control	on/off
Voltage	220 - 240 V / 50 Hz, 60 Hz
Luminaires on B10A fuse	30
Luminaires on B16A fuse	40
Luminaires on C10A fuse	30
Luminaires on C16A fuse	40
Inrush current / Inrush current duration	0.12 A / 5000 µs
CIE Flux Code / CEN Flux Code	33 61 84 73 100
Type of protection	IP 54 ceiling mounting IP 50 wall mounting
Protection class	I
Filament test	650 °C
Impact resistance	IK05
Ambient temperature for maintained power	0 °C ... + 35 °C
Ambient temperature for non-maintained power mode	5 °C ... + 40 °C
Safety marks	D-mark
Conformity mark	CE