

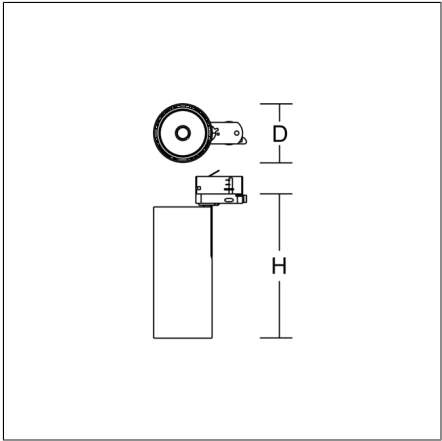
# DEECOS S mini

742202.004.1.76 | Surface mounted projector



Surface mounted projectors  
4051859819981  
D 87, H 214

Track on ceiling, Wall track  
silver



















LED surface-mounted projector in modern design with no visible cooling ribs. Housing: die-cast aluminium, powder-coated. Rotation range: 356°. Swivel range: 90°. Black plastic ring and recessed LED to prevent glare from the side. With adapter for RZB 3-circuit DALI tracks. Suitable for Track on ceiling, Wall track. High quality converter without flickering and stroboscopic effect. The following accessories can be mounted without use of tools: interchangeable lenses, decorative glasses, honeycomb louvre, clear and frosted diffusers, white interchangeable plastic ring.

### Product specifications

Diameter D	87 mm
Height H	214 mm
Weight	1.15 kg
Light source	LED
Colour temperature	4000 K
Rated luminous flux	2050 lm
System power	20 W
System efficiency	103 lm/W
Glare evaluation UGR (4H 8H)	20,9
Beam angle	40°/28°
Rated life	50000 h (L90/B10)
Colour rendering index (CRI)	92
Colour tolerance	2
Photobiological safety according to EN 62471	Risk group 1
Driver	Converter, dimmable
Control	DALI
Voltage	220 - 240 V / 50 - 60 Hz
Luminaires on B10A fuse	21
Luminaires on B16A fuse	34
Luminaires on C10A fuse	35
Luminaires on C16A fuse	57
Inrush current / Inrush current duration	18 A / 250 µs
CIE Flux Code / CEN Flux Code	95 100 100 100 100
Type of protection	IP 20
Protection class	I
Filament test	650°C - 30 seconds
Impact resistance	IK06
Ambient temperature	25 °C
Conformity mark	CE, EAC

## Accessories

	982370.000 Diffuser, transparent		982370.010 Diffuser, satinated
	982371.003 Anti-glare honeycomb louvre		982369.003 Spot lens
	982369.013 Medium lens		982369.023 Flood lens
	982421.002 White plastic ring for lens.		982368.003 Reflector spot
	982368.013 Reflector medium		982368.023 Reflector flood
	982369.033 Wide flood lens		982369.043 Oval corridor lens
	982419.002 White plastic ring for reflector.		982368.033 Reflector wide flood
	982647.002 Decorative glass opal matt		982648.002 Decorative glass opal matt