


Pendant luminaires
4051859974574
L 851, B 110, H 88

pendant
silver, matt (approx. RAL 9006)

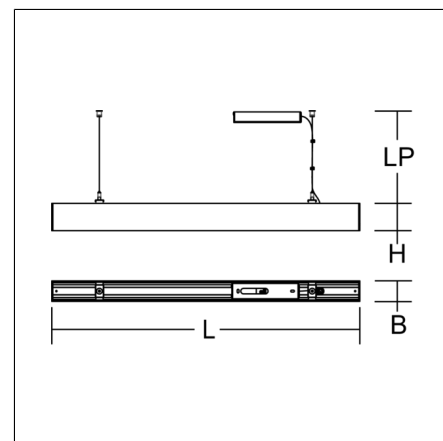

Linear pendant luminaire for aesthetically sophisticated lighting. Housing: extruded aluminium profile, powder-coated. End cap aluminium powder-coated, without visible screws. Canopy made of aluminium, powder-coated. Diffuser made of non-yellowing plastic (PMMA) micro-prismatic. Specially matched 2-component optical system for glare-free light at the workstation (suitable for use in environments with computer screens in accordance with EN 12464-1). Direct/indirect light emission can be switched separately. Suitable for pendant. 2-point steel cable suspension freely positionable and infinitely height-adjustable. Special lengths available on request. LED unit with integrated converter interchangeable and removable. Suitable for through-wiring.

Product specifications

Length L	851 mm
Width B	110 mm
Height H	88 mm
Suspension length LP	2000 mm
Weight	4.45 kg
Light source	LED
Colour temperature	#4000 K #4000 K
Rated luminous flux	3200 lm
System power	23 W
System efficiency	139 lm/W
Glare evaluation UGR (4H 8H)	14,6
Beam angle	down 81°/83° up 112°/114°
Rated life	50000 h (L90/B50)
Colour rendering index (CRI)	80
Colour tolerance	3
Photobiological safety according to EN 62471	Risk group 1
Driver	Converter, dimmable
Control	DALI
Voltage	220 - 240 V / 50 Hz, 60 Hz
Luminaires on B10A fuse	19
Luminaires on B16A fuse	30
Luminaires on C10A fuse	31
Luminaires on C16A fuse	50
Inrush current / Inrush current duration	21 A
CIE Flux Code / CEN Flux Code	66 91 98 52 100
Type of protection	IP 20
Protection class	I
Filament test	650°C - 30 seconds
Impact resistance	IK03
Ambient temperature	-20 °C ... + 35 °C
Conformity mark	CE