

# PRODUCT DATASHEET

## LN INDV D 1200 34 W 4000 K ZBVR

LINEAR IndiviLED® DIRECT Zigbee GEN 1 | Surface mounted luminaire for single luminaire or light line application with Zigbee 3.0 technology



### Areas of application

- Direct replacement for luminaires with fluorescent lamps
- Offices, schools
- General indoor illumination
- Corridors, entrance areas
- Seamless linear lighting
- Shop lighting

### Product benefits

- Suitable luminaire for VIVARES and other Zigbee 3.0 Light Management Systems
- Homogenous light distribution and reduced glare thanks to the IndiviLED® optics
- Multiple mounting options
- The product family offers full lighting solution for different applications
- Energy savings of up to 50 % compared to T5 batten luminaires
- Further variants additionally available with DALI ECG, emergency lighting function according to IEC 60598-2-22 or through wiring
- Robust structure with IK06
- Low flicker light thanks to special electronic control gear
- 5 years guarantee

### Product features



- IoT-ready luminaire with Zigbee 3.0 technology
- Each LED with individual lens and reflector for UGR < 16 and homogenous light distribution
- Pendant mounting with suspension kit
- Linkable into seamless light line with line connection adapter (surface or pendant mounting)
- Available with length of 1200 or 1500 mm
- Luminous flux up to 5700 lm
- Luminous efficacy: up to 125 lm/W
- Initial color consistency: 3 SDCM
- Glow Wire Test according to IEC 60695-2-12: 850 °C
- Versions available with CRI 90
- Lifetime (L70/B50): 60,000 h (at 25 °C)


## TECHNICAL DATA

### Electrical data


Nominal wattage	34.00 W
Nominal voltage	220...240 V
Mains frequency	50...60 Hz
Nominal current	290 mA
Inrush current	30 A
Inrush current time $T_{h50}$	200 $\mu$ s
Max. number of luminaires per miniature circuit breaker B16	11
Max. number of luminaires per miniature circuit breaker C10	10
Max. number of luminaires per miniature circuit breaker C16	16
Power factor $\lambda$	$\geq 0.90$
Total harmonic distortion	$\leq 10 \%$
Protection class	I
Operating mode	Integrated LED driver
Dimming interface	Zigbee 3.0

### Photometrical data

Luminous flux	4200 lm
Luminous efficacy	125 lm/W
Color temperature	4000 K
Light color (designation)	Cool White
Color rendering index Ra	> 80
Standard deviation of color matching	3 sdc <sub>m</sub>
Low flicker	Yes
Flickering metric (Pst LM)	-
Stroboscope effect metric (SVM)	-
Photobiological safety group acc. to EN62778	RG1
Photobiological safety group acc. to EN62471	RG0
Beam angle	70 °
UGR	< 16

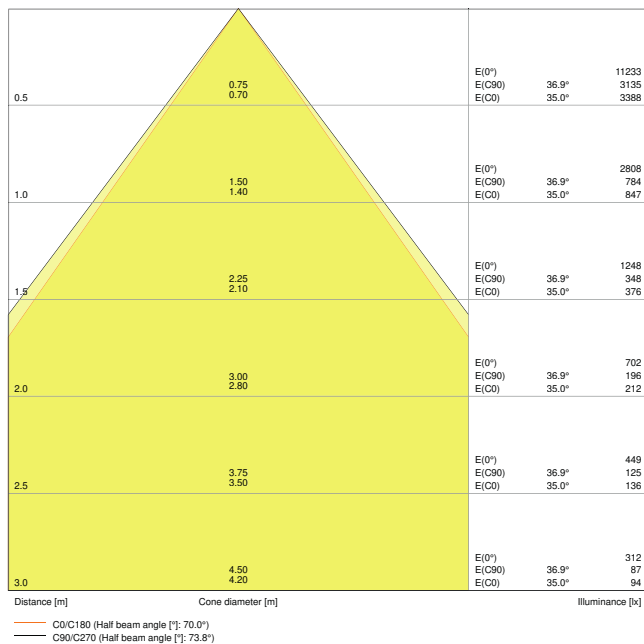


LN INDV D 1200 34W4000K ZBVR

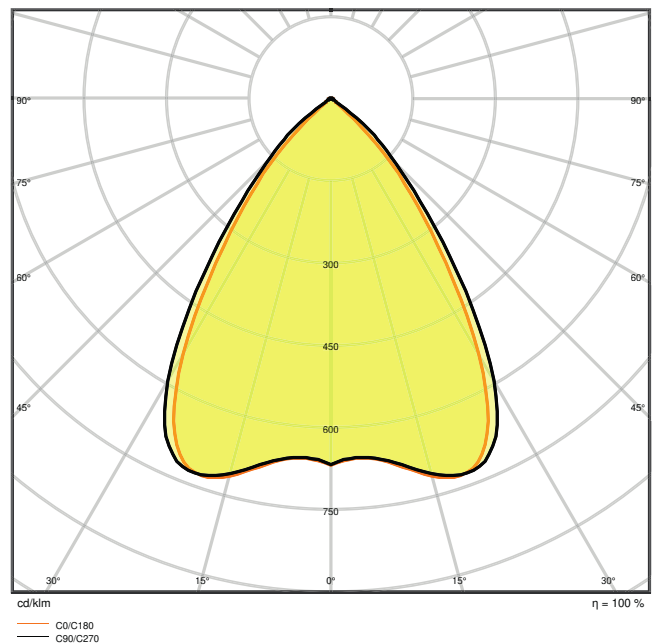

LN INDV D 1200 34W4000K ZBVR

Dimensions & Weight

Length	1199.00 mm
Width	120.00 mm
Height	40.00 mm
Product weight	2500.00 g

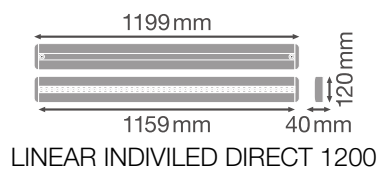

Materials & Colors

Product color	White
Housing color	White
Body material	Aluminum
Cover material	Aluminium

Light emitting surface material	Polycarbonate (PC)
Glow Wire Test according to IEC 60695-2-12	650 °C
Mercury content	0.0 mg

### Application & Mounting

Ambient temperature range	-25...+50 °C
Type of connection	Screwless terminal
Type of protection	IP20
Protection class IK (shock resistance)	IK06
Dimmable	Yes
Type of dimming	ZIGBEE
Mounting type	Suspended/Surface
Mounting location	Ceiling
Application environment	Indoor
With light source	Yes

### Lifespan

Lifespan L70/B50 at 25 °C	60000 h <sup>1)</sup>
Lifespan L80/B10 at 25 °C	50000 h <sup>1)</sup>
Lifespan L80/B50 at 25 °C	50000 h
Lifespan L90/B10 at 25 °C	35000 h
Number of switching cycles	100000

<sup>1)</sup> t[h]: L70 / B50 @ 25 °C (Ta), t[h]: L80 / B10 @ 25 °C (Ta), t[h]: L90 / B10 @ 25 °C (Ta)

### Control gear

Output current	850 mA
----------------	--------

### Certificates & Standards
















Standards	CE / CB / ENEC / EAC
Luminaire with limited surface temperature, "D sign"	No
Ball shot safe	No
Replaceable light source (EPREL)	Not replaceable

### EQUIPMENT / ACCESSORIES

- Ceiling connection box available
- Suspension kit available
- Line connection adapter available

– Through-wiring cable kit available

## DOWNLOAD DATA

Documents and certificates		Document name
	User instruction / safety instructions	UI_Linear_IndiviLED_D
	Extended installation guide	Quick Installation Guide Vivares Zigbee
	Legal information	LSI LINEAR IndiviLED DIRECT ZBVR
	Legal information	Informationstext 18 Abs 4 ElektroG
	Declarations of conformity	LN INDV D ZBVR
Photometric and lighting design files		Document name
	IES file (IES)	LN INDV D 1200 34W4000K ZBVR
	LDT file (Eulumdat)	LN INDV D 1200 34W4000K ZBVR
	ULD file (DIALux)	LN INDV D 1200 34W-4000K
	ROLF file (RELUX)	N INDV D 1200
	UGR file (UGR table)	LN INDV D 1200 34W4000K ZBVR
	Light distribution curve type cone	LN INDV D 1200 34W4000K ZBVR
	Light distribution curve type polar	LN INDV D 1200 34W4000K ZBVR
CAD/BIM files		Document name
	BIM Revit 3D	Linear IndiviLED G1
	CAD STEP 3D	LN INDV 1200
Tender texts		Document name
	Tender documents	LINEAR IndiviLED DIRECT Zigbee 1200 34 W 4000 K ZBVR -EN

---

## LOGISTICAL DATA

Product code	Packaging unit (Pieces/Unit)	Dimensions (length x width x height)	Gross weight	Volume
4058075521902	Folding box 1	132 mm x 1,334 mm x 52 mm	2693.00 g	9.16 dm <sup>3</sup>
4058075521919	Shipping box 4	1,357 mm x 207 mm x 169 mm	11702.00 g	47.47 dm <sup>3</sup>

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

---

## References / Links

– For Guarantee see [www.ledvance.com/guarantee](http://www.ledvance.com/guarantee)

---

## DISCLAIMER

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.