


Cable junction box

WKE 6 - 5/3 x 10² 1D0

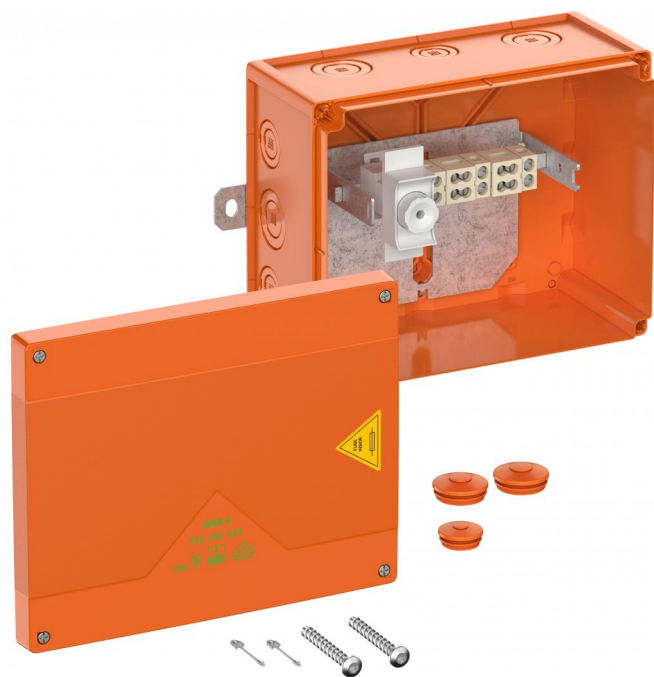

WKE 6 - 5/3 x 10² 1D0

Cable junction box

Productnumber: 86922120

Dimensions: 200 x 250 x 120 mm

Cable junction box, with protection class IP66, $U_i=450V$ AC, certified according to UL-EU (EN 62208), UL-EU (EN 61439-1/-2), M20/M25/M32/M40, (4 Rear, 12 Side), External fastening points, with E30 - E 90 electrical functional integrity according to DIN 4102 Part 12. Halogen-free enclosure made of special thermoplastic, terminals made of high-temperature-resistant special ceramic, universally positionable terminal holder

orange, Junction box 5-pole 1.5 - 10 mm², junction box 3-pole 1.5 - 10 mm², fuse in branch 1 x socket D01 (without insert), number of clampable wires per terminal point 4 x 1.5² / 3 x 2.5² / 2 x 4² / 1 x 6² / 1 x 10²

Accessories supplied:

Cover retaining straps, screw anchors, 1 off double membrane seals M25 IP66 sealing area 9 - 16 mm, 2 off double membrane seals M32 IP66 sealing area 14 - 21 mm



Technical Data

electrical characteristics

Rated insulation voltage AC:	450 V
Rated insulation voltage DC:	450 V
max. wire cross section (wire branching):	4 mm ²
Max. conductor cross section:	10 mm ²
Min. conductor cross section:	1,5 mm ²
Min. conductor cross section:	1,5 mm ²
Protection class:	II
Type of protection:	IP66
secured junction:	yes
Circuit integrity class:	E30/E60/E90
Number of poles (T-piece):	3
Number of poles (feed-through):	5
UL Type Rating:	other
Number of fuses in T-piece:	1

Colours

Base unit colour:	orange
Cover colour:	orange

Additional features

Range of application:	Fused T-piece
-----------------------	---------------

Dimensions

Width:	200 mm
Length:	250 mm
Height:	120 mm
Inner length:	235 mm
Inner width:	185 mm
Inner height:	102 mm

Material characteristics

suitable for exterior use:	yes
Industry quality:	yes
Halogen free:	yes
Flammability class according with UL94:	V0
Glow-wire flammability according to EN 60695-2-11:	960 °C

mechanical properties

Type of fastening:	Wall/ceiling mounting
Impact strength:	IK08
Sealable:	yes

Ambient conditions

max. relative humidity 25°C:	95 %
max. relative humidity 40°C:	50 %
Min. ambient temperature:	-35 °C
Max. ambient temperature:	40 °C
24h ambient temperature:	60 °C

Material

Base unit material:	Polycarbonate
Cover material:	Polycarbonate
Sealing material:	Polyurethane
Cover screw material:	Stainless steel V2A

Certificates

Test mark:	UL-EU (EN 62208)
Test mark:	UL-EU (EN 61439-1/-2)

Accessories

[26062001 - DMS M20/or - Double-membrane seals](#)

[26062501 - DMS M25/or - Double-membrane seals](#)

[26063201 - DMS M32/or - Double-membrane seals](#)

[26064001 - DMS M40/or - Double-membrane seals](#)

[22762001 - KVR M20-MGM/or - Cable gland](#)

[22762501 - KVR M25-MGM/or - Cable gland](#)

[22763201 - KVR M32-MGM/or - Cable gland](#)

[22764001 - KVR M40-MGM/or - Cable gland](#)

[86310001 - WKE BK 1 - Mounting plate](#)

Cable gland

