



MASTER TL5 High Output Eco

MASTER TL5 HO Eco 20=24W/840 UNP/40

This extremely efficient TL5 lamp (tube diameter 16 mm) saves considerable energy by simple lamp-for-lamp replacement. The TL5 HO Eco lamp is optimized for installations requiring high light output and offers excellent lumen maintenance and color rendering. Application areas vary from offices and industry to schools and retail environments.

Warnings and Safety

- A reduction in energy consumption is only achieved with current-controlled gear.
- The lamps operate perfectly with power-controlled gear, but in that case the light output can be up to 10% higher.
- A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.

Product data

General Information		Color rendering index (CRI)	
Cap-Base	G5 [G5]		80
Features	na [Not Applicable]	Operating and Electrical	
Flux measurement reference	Sphere	Power Consumption	19.3 W
		Lamp Current (Nom)	0.300 A
Light Technical		Controls and Dimming	
Color Code	840 [CCT of 4000K]	Dimmable	Yes
Luminous Flux	1,650 lumen	Mechanical and Housing	
Color Designation	Cool White (CW)	Bulb Shape	T5 [16 mm (T5)]
Chromaticity Coordinate X (Nom)	0.38		
Chromaticity Coordinate Y (Nom)	0.38		
Correlated Color Temperature (Nom)	4000 K		
Luminous Efficacy (rated) (Nom)	85 lm/W		

MASTER TL5 High Output Eco

Approval and Application

Mercury (Hg) Content (Nom)	1.2 mg
Energy Consumption kWh/1000 h	20 kWh
EPREL Registration Number	423,466

Product Data


Full product code	872790088086100
Order product name	MASTER TL5 HO Eco 20=24W/840 UNP/40

Order code	927989984031
Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	40
Material number (12NC)	927989984031
Full product name	MASTER TL5 HO Eco 20=24W/840 UNP/40
EAN/UPC - Case	8727900880861

Dimensional drawing

Product	D (max)	A (max)	B (max)	B (min)	C (max)
MASTER TL5 HO Eco 20=24W/840 UNP/40	17 mm	549.0 mm	556.1 mm	553.7 mm	563.2 mm



Photometric data



Spectral Power Distribution Colour - MASTER TL5 HO Eco 20=24W/840 UNP/40


MASTER TL5 High Output Eco

Lifetime

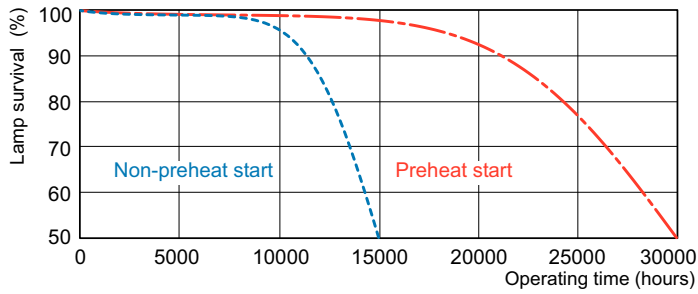

Life Expectancy Diagram - MASTER TL5 HO Eco 20=24W/840 UNP/40

Life Expectancy Diagram - MASTER TL5 HO Eco 20=24W/840 UNP/40

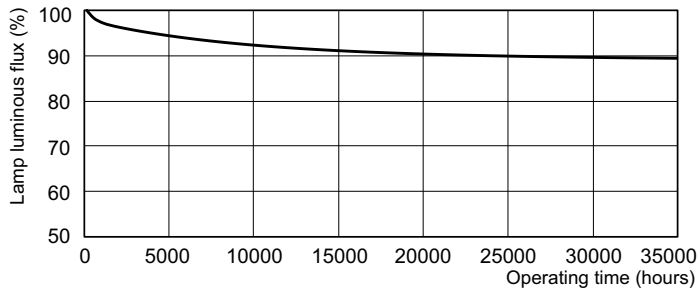

Lumen Maintenance Diagram - MASTER TL5 HO Eco 20=24W/840 UNP/40

