


Ceiling luminaires
4051859231745
L 1512, B 28, H 38

Ceiling mounting, Wall (surface)
traffic white, matt (RAL 9016)

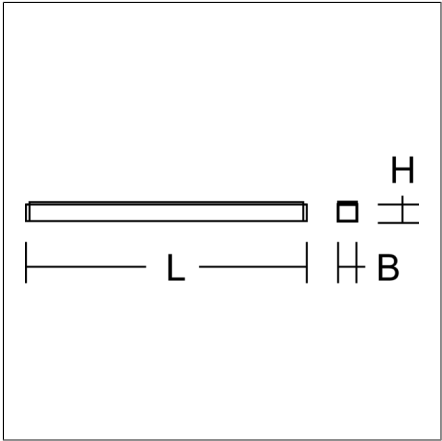

Ceiling luminaire with slim design. Housing: extruded aluminium profile, powder-coated. End cap aluminium powder-coated. Diffuser made of non-yellowing plastic (PMMA) microprismatic. Suitable for Ceiling mounting, Wall (surface). External driver with connecting cable.

Product specifications

Length L	1512 mm
Width B	28 mm
Height H	38 mm
Weight	1.47 kg
Light source	LED
Colour temperature	3000 K
Rated luminous flux	3250 lm
System power	43 W
System efficiency	76 lm/W
Glare evaluation UGR (4H 8H)	24,9
Beam angle	62°/88°
Rated life	60000 h (L80/B10)
Colour rendering index (CRI)	82
Colour tolerance	3
Photobiological safety according to EN 62471	Risk group 1
Driver	Converter, dimmable
Control	DALI
Voltage	220 - 240 V / 50 - 60 Hz
Luminaires on B10A fuse	13
Luminaires on B16A fuse	21
Luminaires on C10A fuse	22
Luminaires on C16A fuse	36
Inrush current / Inrush current duration	41 A / 150 µs
CIE Flux Code / CEN Flux Code	65 89 98 100 100
Type of protection	IP 20
Protection class	II
Filament test	650°C - 30 seconds
Impact resistance	IK00
Ambient temperature	25 °C
Conformity mark	CE, EAC