


RONDOS maxi

911663.004.2 | Recessed projectors



Recessed projectors
4051859863779
D 178, H 3

Recessed ceiling mounting
silver

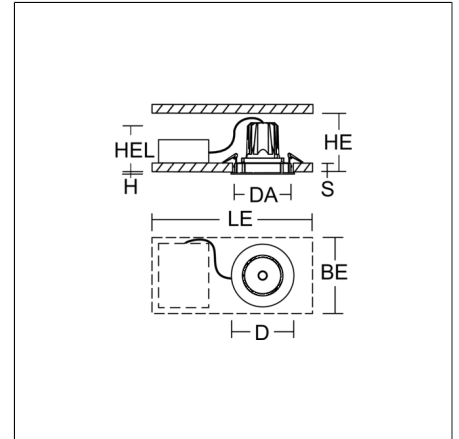

LED recessed projector in a modern design with no visible cooling ribs. Housing: die-cast aluminium, powder-coated. Rotation range: 356°; swivel range: $\pm 35^\circ$. Black plastic ring and recessed LED to prevent glare from the side. Optical assembly with reflector made of MIRO-Silver with 98% total light reflection for outstanding efficiency - can be changed without tools. Special LED for illumination of pastries included. Suitable for Recessed ceiling mounting. Installation without tools thanks to spring fastening system. Including separate LED converter with connecting cable 600 mm. High quality converter without flickering and stroboscopic effect. Through-wiring box (5 pole) available as accessory. The following accessories can be mounted without use of tools: interchangeable lenses, decorative glasses, honeycomb louvre, clear and frosted diffusers, white interchangeable plastic ring.

RONDOS maxi

911663.004.2 | Recessed projectors



Product specifications

Diameter D	178 mm
Height H	3 mm
Cut-out diameter DA	168 mm
Luminaire: recess height HEL	140 mm
Ceiling thickness S	1-20 mm
Installation space length LE	550 mm
Installation space width BE	350 mm
Installation space height HE	200 mm
Weight	1.12 kg
Light source	LED
Colour temperature	bakery
Rated luminous flux	3300 lm
System power	33 W
System efficiency	100 lm/W
Glare evaluation UGR (4H 8H)	13,6
Beam angle	17°
Rated life	50000 h (L90/B10)
Colour rendering index (CRI)	97
Colour tolerance	3
Photobiological safety according to EN 62471	Risk group 1
Driver	Converter
Control	on/off
Voltage	220 - 240 V / 50 Hz, 60 Hz
Luminaires on B10A fuse	21
Luminaires on B16A fuse	34
Luminaires on C10A fuse	35
Luminaires on C16A fuse	57
Inrush current / Inrush current duration	12.6 A / 250 µs
CIE Flux Code / CEN Flux Code	100 100 100 100 100
Type of protection	IP 20
Protection class	II
Filament test	650 °C
Impact resistance	IK06
Ambient temperature	-20 °C ... + 25 °C
Safety marks	Do not cover the recessed luminaire!
Conformity mark	CE, EAC


Accessories



982373.003
Spot lens



982373.023
Flood lens




982374.000
Diffuser, transparent



982422.002
White plastic ring for lens.



982373.013
Medium lens



982375.003
Anti-glare honeycomb louvre



982374.010
Diffuser, satinated



982372.003
Reflector spot

RONDOS maxi

911663.004.2 | Recessed projectors



982372.013
Reflector medium



982372.023
Reflector flood



982372.033
Reflector wide flood



982420.002
White plastic ring for reflector.



982703.002
Through-wiring box