



# Ledinaire StreetLight

## BRP062 LED72/740 PSU 54W SLA CE

- LED72 | LED module 7200 lm - Electronic transformer - Safety class II - - - Side-entry for diameter 48 to 60 mm

Ledinaire Streetlight has been designed with Led transition in mind. Whether to refurbish old HID lanterns, or on a new country street, where you want citizens to feel safe. Ledinaire Streetlight offers simple benefits and reliable performance

### Product data

General Information	
Lamp family code	LED72 [LED module 7200 lm]
Light source replaceable	No
Number of gear units	1 unit
Driver included	Yes
Light source engine type	LED
Lighting Technology	LED
Value ladder	Value

Light Technical	
Upward light output ratio	0
Luminous Flux	6,302.2 lumen
Standard tilt angle posttop	-
Standard tilt angle side entry	0°
Correlated Color Temperature (Nom)	4000 K
Luminous Efficacy (rated) (Nom)	117 lm/W
Color rendering index (CRI)	>70
Light source color	740 neutral white
Optical cover/lens type	Polycarbonate
Luminaire light beam spread	-

Optic type outdoor	-
--------------------	---

Operating and Electrical	
Input Voltage	220/240 V
Line Frequency	50 or 60 Hz
Input Frequency	50 or 60 Hz
Power Consumption	54 W
Inrush current	1.2 A
Inrush time	14 ms
Power Factor (Fraction)	0.95
Connection	-
Cable	Cable 0.5 m without plug
Number of products on MCB of 16 A type B	40

Temperature	
Ambient temperature range	-30 to +40 °C

Controls and Dimming	
Dimmable	No
Driver/power unit/transformer	Electronic transformer

# Ledinaire StreetLight

Control interface	-
Constant light output	No

## Mechanical and Housing

Housing Material	Aluminium pressure die cast
Reflector material	-
Optic material	Polycarbonate
Optical cover/lens material	Polycarbonate
Fixation material	Aluminum
Housing Color	Dark gray
Mounting device	Side-entry for diameter 48 to 60 mm
Optical cover/lens shape	Curved
Optical cover/lens finish	Clear
Overall length	473 mm
Overall width	165 mm
Overall height	80 mm
Effective projected area	0.08 m <sup>2</sup>
Dimensions (Height x Width x Depth)	80 x 165 x 473 mm

## Approval and Application

Ingress protection code	IP65 [Dust penetration-protected, jet-proof]
Mech. impact protection code	IK07 [2 J reinforced]
Surge Protection (Common/Differential)	Luminaire surge protection level until 4 kV differential mode and 4 kV common mode
Sustainability rating	-
Protection class IEC	Safety class II
Flammability mark	-
CE mark	Yes
ENEC mark	-
Warranty period	3 years

Photobiological risk	Photobiological risk group 1 @200mm to EN62778
Photobiological risk specification	4 m
EU RoHS compliant	Yes

## Initial Performance (IEC Compliant)

Luminous flux tolerance	+/-7%
Initial chromaticity	(0.3743 / 0.3743) SDCM 5
Power consumption tolerance	+/-10%
Init. Color Rendering Index Tolerance	+/-2

## Over Time Performance (IEC Compliant)

Lumen maintenance at median useful life*	L80 50000 h
--	----------------

## Application Conditions


Performance ambient temperature Tq	25 °C
Maximum dim level	Not applicable

## Product Data

Full product code	871951451210899
Order product name	BRP062 LED72/740 PSU 54W SLA CE
Order code	919515814273
Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	4
Material number (12NC)	919515814273
Full product name	BRP062 LED72/740 PSU 54W SLA CE
EAN/UPC - Case	8719514511507



## Dimensional drawing

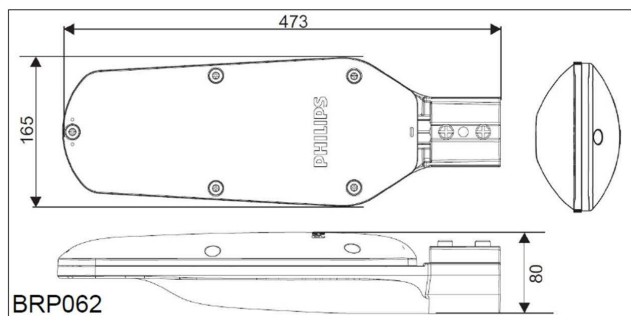

## Ledinaire StreetLight

