


MEGA LATERNE F

612165.004 | Bollards



Bollards
4051859365006
D 115, H 500

free-standing
silver, matt (approx. RAL 9006)

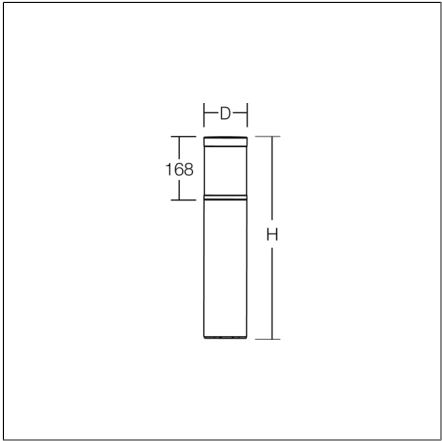

Attractive cylindrical bollard with innovative housing design and high-quality LED optics. Luminaire tube Ø 115 mm made of corrosion-resistant aluminium profile, powder coated. Recessed stainless steel fixing plate. Non-corrosive gear compartment made of mould-cast dual compound thermoplastic with integral TP gasket. With membrane valve to avoid condensation. Seawater resistant coating. Luminaire head made of die cast aluminium, powder-coated, with opal cylinder (glass). The robust stainless steel mounting base ensures long-term stability. Elongated holes in the base for subsequent and simple alignment of the luminaire. Connection box on base, max. 2 x 3 x 2.5 mm² for through wiring.

Product specifications

Diameter D	115 mm
Height H	500 mm
Weight	3.01 kg
Light source	1 x QA60 (clear) max. 57 W, E27
Rated luminous flux	170 lm
System power	20 W
System efficiency	9 lm/W
Glare evaluation UGR (4H 8H)	15,6
	down 180° up 180°
Beam angle	
Driver	Not necessary
Control	on/off
Voltage	0 - 250 V / 0 - 60 Hz
CIE Flux Code / CEN Flux Code	8 30 62 47 74
Type of protection	IP 65
Protection class	I
Filament test	650°C - 30 seconds
Impact resistance	IK05
Ambient temperature	-20 °C ... + 35 °C
Conformity mark	CE, EAC

Accessories



982103.000
Accessory for ground installation

Spareparts



982262.014
Luminaire head, silver