




Wall luminaires
4051859748748
L 1967, B 67, H 75

Wall (surface)
deep black, matt (RAL 9005)

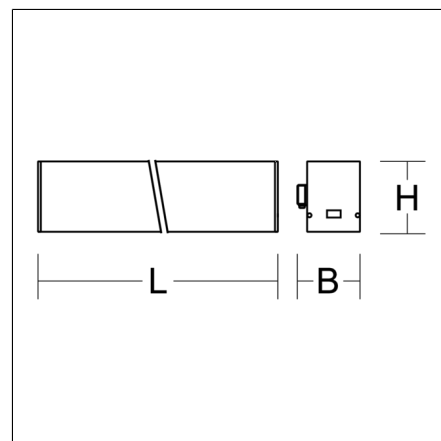

Linear wall luminaires. Housing: extruded aluminium profile, powder-coated. End cap aluminium powder-coated. Diffuser made of non-yellowing plastic (PMMA), opal. Direct 50%, indirect 50% light emission. Suitable for Wall (surface). LED unit with integrated converter interchangeable and removable. Suitable for through-wiring. With sensors or as a safety luminaire on request.

Product specifications

Length L	1967 mm
Width B	67 mm
Height H	75 mm
Weight	5.2 kg
Light source	LED
Colour temperature	#3000 K #3000 K
Rated luminous flux	4550 lm
System power	34 W
System efficiency	134 lm/W
Glare evaluation UGR (4H 8H)	19,3
Beam angle	down 107°/108° up 108°/107°
Rated life	70000 h (L80/B10)
Colour rendering index (CRI)	80
Colour tolerance	3
Photobiological safety according to EN 62471	Risk group 1
Driver	Converter, dimmable
Control	DALI
Voltage	220 - 240 V / 50 Hz, 60 Hz
Luminaires on B10A fuse	16
Luminaires on B16A fuse	26
Luminaires on C10A fuse	27
Luminaires on C16A fuse	44
Inrush current / Inrush current duration	26 A / 140 µs
CIE Flux Code / CEN Flux Code	48 80 96 50 100
Type of protection	IP 20
Protection class	I
Filament test	650 °C
Impact resistance	IK03
Ambient temperature	5 °C ... + 35 °C
Conformity mark	CE