




Wall luminaires
4051859747956
L 1407, B 67, H 75

Wall (surface)
deep black, matt (RAL 9005)

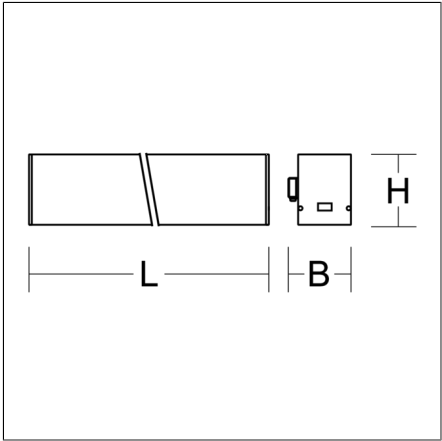

Linear wall luminaires. Housing: extruded aluminium profile, powder-coated. End cap aluminium powder-coated. Diffuser made of non-yellowing plastic (PMMA), opal. Direct light emission. Suitable for Wall (surface). LED unit with integrated converter interchangeable and removable. Suitable for through-wiring. With sensors or as a safety luminaire on request.

Product specifications

Length L	1407 mm
Width B	67 mm
Height H	75 mm
Weight	3.11 kg
Light source	LED
Colour temperature	3000 K
Rated luminous flux	1850 lm
System power	15 W
System efficiency	123 lm/W
Glare evaluation UGR (4H 8H)	23,7
Beam angle	107°/107°
Rated life	70000 h (L80/B10)
Colour rendering index (CRI)	80
Colour tolerance	3
Photobiological safety according to EN 62471	Risk group 1
Driver	Converter
Control	on/off
Voltage	220 - 240 V / 50 - 60 Hz
Luminaires on B10A fuse	50
Luminaires on B16A fuse	90
Luminaires on C10A fuse	94
Luminaires on C16A fuse	151
Inrush current / Inrush current duration	16 A / 100 µs
CIE Flux Code / CEN Flux Code	48 80 96 100 100
Type of protection	IP 20
Protection class	I
Filament test	650°C - 30 seconds
Impact resistance	IK03
Ambient temperature	5 °C ... + 35 °C
Conformity mark	CE