

# Product Data Sheet

## DX30128


DF Range



Flexible protected conduit system range DF DIFLEX made in thermoplastic PVC, classification 2311. In compliance with IEC 61386-1 (CEI 23/80) e IEC 61386-23 (CEI 23/83). The range includes conduit system available in 14 diameter, from 8 to 60 mm in grey, black and blue colour. Suitable for for the protection of conductors in fixed or mobile installations in residential applications, and on board operating achinery in industrial applications thanks to its flexibility and resistance to mineral oils. Installation type: exposed on walls and ceilings or for applications inside false ceilings and floating floors.

|  |  |  |                               |
|--|--|--|-------------------------------|
| Colour   | Black RAL 9005                                 | Material   | PVC                           |
| Sheath Ø (mm)  | 28   | Glow Wire Test   | 960 °C                        |
| Electrocod   | 21320  | Resistance to compression  | 2 (Light - 320 N)             |
| Resistance to impact   | 3 (Medium - 2 J)                               | Resistance to bending  | 4 (Flexible)                  |
| Electrical characteristics   | 2 (With electrical insulating characteristics) | Fire resistance  | 1 (Non-flame propagating)     |
| Classification   | 2311   | Minimum bend radius  | 10 times the diameter         |
| Insulation resistance  | 100 M.Ω a 500V for 1 minute                    | Dielectric rigidity  | 2000 V a 50 Hz for 15 minutes |
| Protection against ingress of solid objects with revolving and fixed couplings | 5  | Protection against ingress of solid objects with conduit-sheath unions | 6                             |
| Protection against ingress of water with revolving and fixed couplings         | 4  | Protection against ingress of water with conduit-sheath unions         | 5                             |
| Tensile strength   | 1 (Very light)                                 | Suspended load capacity  | Not applicable                |
| Standard   | EN 61386-1 EN 61386-23                         | Family   | Diflex                        |

### DIMENSIONAL

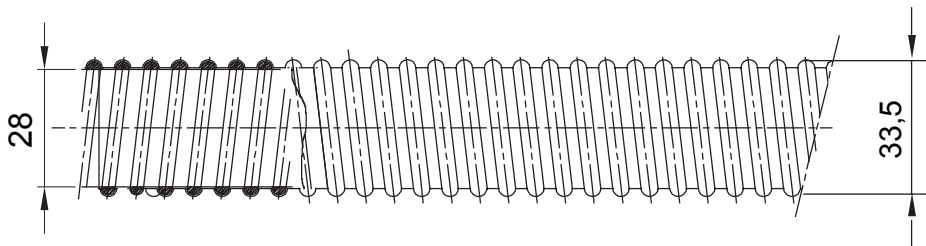

### TECHNICAL SYMBOLOGY

GWT



CLASSIFICATION  
**2311**  
EN 50086  
EN 61386

960 °C

### STANDARDS/APPROVALS



GEWISS S.p.A. Via A. Volta, 1  
24069 Cenate Sotto - Bergamo - Italy  
tel. +39 035 94 61 11 fax +39 035 94 69 09

www.gewiss.com  
sat@gewiss.com  
Last update 20/04/2023

Data, measures, designs and pictures are shown only as informative purposes, and could be changed without previous notice