



# CoreLine Waterproof

## WT120C G2 LED60S/840 PSU TW1 WEC L1500

CoreLine Waterproof, 44 W, L1500 mm, 6000 lm, 4000 K, Wide beam, Frosted, IP65, IK08, TW1, Adels

CoreLine waterproof delivers on the CoreLine promise of innovative, easy-to-use and high-quality luminaires. With its slim and stylish design, it retains the product architecture that the range is well-known and appreciated for. Installation is quick and easy, all thanks to its efficient design. CoreLine waterproof provides better wide-beam light distribution for straightforward and effective lighting. A direct replacement for traditional waterproof luminaires with fluorescent lamps ranging from 18W up to 58W, it delivers significant energy savings. Interact Ready luminaires with integrated wireless communications are also available in the CoreLine waterproof range, ready to be used with Interact connected lighting system.

### Warnings and Safety

- UV radiation will damage the material over time resulting in loss of waterproof sealing and IP66 rating.
- Do not install the luminaire in locations where it will be exposed to direct sunlight.

### Product data

General Information	
Lamp family code	LED60S [LED Module, system flux 6000 lm]
Light source replaceable	No
Number of gear units	1 unit
Driver included	Yes
Service tag	Yes
Lighting Technology	LED
Value ladder	Performance
Warranty period	5 years

Sustainability rating	-
Light Technical	
Luminous Flux	6,000 lm
Correlated Color Temperature (Nom)	4000 K
Luminous Efficacy (rated) (Nom)	136 lm/W
Color rendering index (CRI)	>80
Light source color	840 neutral white
Optic type	Wide beam
Luminaire light beam spread	105°


# CoreLine Waterproof

Unified glare rating CEN	25
<b>Operating and Electrical</b>	
Input Voltage	220 to 240 V
Line Frequency	50 or 60 Hz
Inrush current	5.56 A
Inrush time	0.047 ms
Power Consumption	44 W
Power Factor (Fraction)	0.9
Connection	Waterproof External plug-in connector 3-pole
Cable	-
Number of products on MCB of 16 A type B	36
Suitable for random switching	Not applicable
Protection class IEC	Safety class I
Feed-through wiring	Feed-through wiring 1-phase
Total harmonic distortion	20 %
<b>Wiring</b>	
Connector Type	Adels
<b>Controls and Dimming</b>	
Dimmable	No
Driver/power unit/transformer	Power supply unit (On/Off)
Control interface	-
Constant light output	No
Maximum dim level	Not applicable
<b>Mechanical and Housing</b>	
Housing Material	Polycarbonate
Reflector material	Steel
Optic material	Polycarbonate
Optical cover material	Polycarbonate
Fixation material	Stainless steel
Housing Color	Gray
Optical cover finish	Frosted
Overall length	1,515 mm
Overall width	80 mm
Overall height	76 mm
Dimensions (Height x Width x Depth)	76 x 80 x 1515 mm
Ingress protection code	IP65 [Dust penetration-protected, jet-proof]
Mech. impact protection code	IK08 [5 J vandal-protected]
Net Weight (Piece)	1.820 kg
<b>Approval and Application</b>	
Glow-wire test	Temperature 850 °C, duration 30 s
Flammability mark	For mounting on easily flammable surfaces


CE mark	Yes
ENEC mark	ENEC mark
Photobiological risk	Photobiological risk group 0 @200mm to EN62778
EU RoHS compliant	Yes
Performance ambient temperature Tq	25 °C
Remarks	*-Per Lighting Europe guidance paper "Evaluating performance of LED based luminaires - January 2018": statistically there is no relevant difference in lumen maintenance between B50 and for example B10. Therefore, the median useful life (B50) value also represents the B10 value.
Flickering value (PstLM) - Flickering value as per EN 61000-3-3	1
Stroboscopic effect visibility measure (SVM)	1.6
Ambient temperature range	-20 to +35 °C
<b>Initial Performance (IEC Compliant)</b>	
Luminous flux tolerance	+/-10%
Initial chromaticity	(0.38,0.38)SDCM<=3
Power consumption tolerance	+/-10%
<b>Over Time Performance (IEC Compliant)</b>	
Control gear failure rate at median useful life 50000 h	5 %
Lumen maintenance (EN-IEC 62722-2-1) at median useful life* 50000 h	L80
Lumen maintenance (EN-IEC 62722-2-1) at median useful life* 100000 h	L70
<b>Product Data</b>	
Order product name	WT120C G2 LED60S/840 PSU TW1 WEC L1500
Full product name	WT120C G2 LED60S/840 PSU TW1 WEC L1500
Full product code	871869916319800
Order code	910505100070
Material Nr. (12NC)	910505100070
Numerator - Quantity Per Pack	1
EAN/UPC - Product/Case	8718699163198
Numerator - Packs per outer box	1
EAN/UPC - Case	8718699163198
Product family code	WT130C [Coreline Waterproof G2 LSC]

# CoreLine Waterproof

## Dimensional drawing

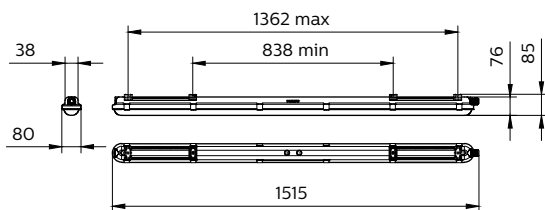

## Photometric data



Polar Normal (separate) - WT120CI - 910505100070

