



LumiStreet gen2

BGP293 LED170-4S/740 II DM11 48/60S

LUMISTREET GEN2 MEDIUM - LED module 17000 lm - 740 neutral white - Safety class II - Distribution medium 11 - Side-entry for diameter 48 to 60 mm

Increasing numbers of municipalities are having to upgrade large-scale conventional street lighting installations with energy efficient LED technology. But they are having to do this with smaller and smaller budgets. That's why the new generation of LumiStreet has been upgraded and designed to provide a solution to this challenge, it is the ideal solution for performing point-to-point replacement of conventional lighting. ;LumiStreet gen2 achieves this by offering high efficiency, low Total Cost of Ownership, and ease of installation and maintenance. The ease of installation and maintenance is enabled by the Philips Service tag. Moreover, the Philips SR (System Ready) socket makes it future-ready and you can pair this luminaire with lighting control and software applications such as Interact City.

Product data

General information		Protection class IEC	Safety class II
Lamp family code	LED170 [LED module 17000 lm]	Flammability mark	For mounting on normally flammable surfaces
Light source color	740 neutral white	CE mark	CE mark
Light source replaceable	Yes	ENEC mark	ENEC plus mark
Number of gear units	1 unit	Warranty period	5 years
Driver/power unit/transformer	Power supply unit regulating	Optic type outdoor	Distribution medium 11
Driver included	Yes	Remarks	* At extreme ambient temperatures the luminaire might automatically dim down to protect components
Optical cover/lens type	Flat glass	Constant light output	No
Luminaire light beam spread	160° - 42° x 54°		
Control interface	-		
Connection	2 Push-in connector 5-pole		
Cable	-		


LumiStreet gen2

Number of products on MCB of 16 A type 8	
B	
EU RoHS compliant	Yes
Light source engine type	LED
Service tag	Yes
Serviceability class	Class A, luminaire is equipped with serviceable parts (when applicable): LED board, driver, control units, surge protection device, optics, front cover and mechanical parts
Product family code	BGP293 [LUMISTREET GEN2 MEDIUM]
Light technical	
Upward light output ratio	0
Standard tilt angle posttop	0°
Standard tilt angle side entry	0°
Operating and electrical	
Input Voltage	220 to 240 V
Input Frequency	50 to 60 Hz
Inrush current	53 A
Inrush time	0.3 ms
Power Factor (Min)	0.99
Controls and dimming	
Dimmable	No
Mechanical and housing	
Housing Material	Aluminum die cast
Reflector material	Polycarbonate
Optic material	Polymethyl methacrylate
Optical cover/lens material	Glass
Fixation material	Aluminum
Mounting device	Side-entry for diameter 48 to 60 mm
Optical cover/lens shape	Flat
Optical cover/lens finish	Clear
Overall length	626 mm
Overall width	340 mm
Overall height	95 mm
Effective projected area	0.0246 m²
Color	Gray
Dimensions (Height x Width x Depth)	95 x 340 x 626 mm (3.7 x 13.4 x 24.6 in)

Approval and application	
Ingress protection code	IP66 [Dust penetration-protected, jet-proof]
Mech. impact protection code	IK08 [5 J vandal-protected]
Surge Protection (Common/Differential)	Luminaire surge protection level until 6 kV differential mode and 8 kV common mode
Sustainability rating	-
Initial performance (IEC compliant)	
Initial luminous flux (system flux)	14790 lm
Luminous flux tolerance	+/-7%
Initial LED luminaire efficacy	145 lm/W
Init. Corr. Color Temperature	4000 K
Init. Color Rendering Index	70
Initial chromaticity	(0.381, 0.379) SDCM <5
Initial input power	102 W
Power consumption tolerance	+/-10%
Init. Color Rendering Index Tolerance	+/-2
Over time performance (IEC compliant)	
Control gear failure rate at median useful life 100000 h	10 %
Lumen maintenance at median useful life* 100000 h	L96
Application conditions	
Ambient temperature range	-40 to +50 °C
Performance ambient temperature Tq	25 °C
Maximum dim level	0% (digital)
Product data	
Full product code	871951407909000
Order product name	BGP293 LED170-4S/740 II DM11 48/60S
EAN/UPC - Product	8719514079090
Order code	910925866643
Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	1
Material Nr. (12NC)	910925866643
Copy Net Weight (Piece)	6.500 kg




Dimensional drawing

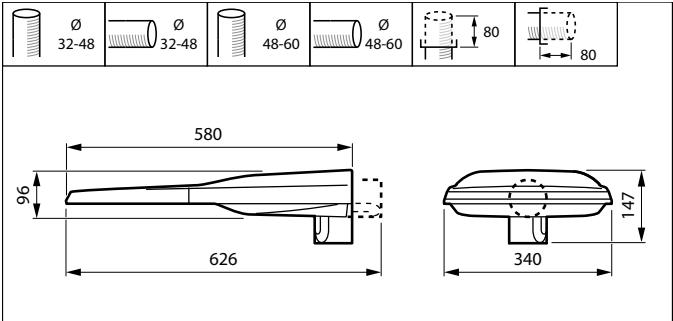


BGP293 LED170-4S/740 II DM11 48/60S

Photometric data

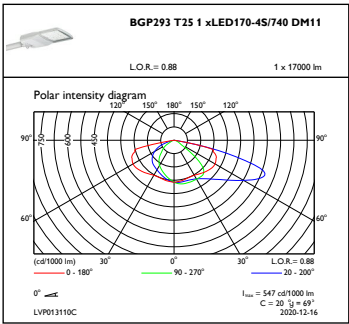

OFPC1_BGP293T251xLED170-4S740DM11

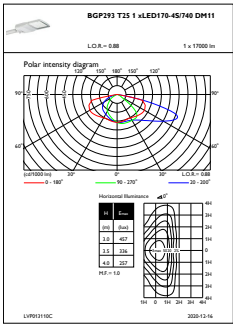

OFPL1_BGP293T251xLED170-4S740DM11

