

PRODUCT DATASHEET

LN SF IP44 DALI 600 P 18W 840 WT

LINEAR SURFACE IP44 DALI | Robust IP44 luminaires with direct light emission, integrated DALI driver, up to 137 lm/W

Areas of application

- Efficient replacement for traditional T8 and T5 luminaires
- Public buildings
- General illumination
- Libraries, schools



Product benefits

- Low maintenance and low operational costs
- Protection against cover falling, theft and vandalism thanks to safety screws
- Cable entry on the back of the luminaire and on each end-caps for easy electrical connection
- Easy and quick installation
- Low flicker light thanks to special electronic control gear
- 5 years guarantee

Product features

- Surface mounted luminaires with direct light emission
- Type of protection: IP44
- Impact resistance: IK08
- Available in 3 different lengths: 600 mm, 1200 mm and 1500 mm
- High luminous efficacy: up to 137 lm/W
- Through-wiring cable already installed



- Lifetime (L80/B10): 70,000 h (at 25 °C)
- White painted steel housing (like RAL: 9003)
- Diffusor material: UV-stable polycarbonate
- End caps (made of polycarbonate) screwed to the housing


TECHNICAL DATA

Electrical data


| | |
|---|-----------------------|
| Nominal wattage | 18.00 W |
| Nominal voltage | 220...240 V |
| Mains frequency | 50...60 Hz |
| Nominal current | 80 mA |
| Inrush current | < 18 A |
| Inrush current time T_{h50} | 190 μ s |
| Max. number of luminaires per miniature circuit breaker B16 | 31 |
| Max. number of luminaires per miniature circuit breaker C10 | 33 |
| Max. number of luminaires per miniature circuit breaker C16 | 53 |
| Power factor λ | > 0.90 |
| Total harmonic distortion | < 20 % |
| Protection class | I |
| Operating mode | Integrated LED driver |
| Dimming interface | DALI-2 |

Photometrical data

| | |
|--|----------------------|
| Luminous flux | 2466 lm |
| Luminous efficacy | 137 lm/W |
| Color temperature | 4000 K |
| Light color (designation) | Cool White |
| Color rendering index Ra | > 80 |
| Standard deviation of color matching | < 3 sdc _m |
| Low flicker | Yes |
| Flickering metric (Pst LM) | < 1 |
| Stroboscope effect metric (SVM) | < 0.4 |
| Photobiological safety group acc. to EN62778 | RG0 |
| Beam angle | 110 ° |

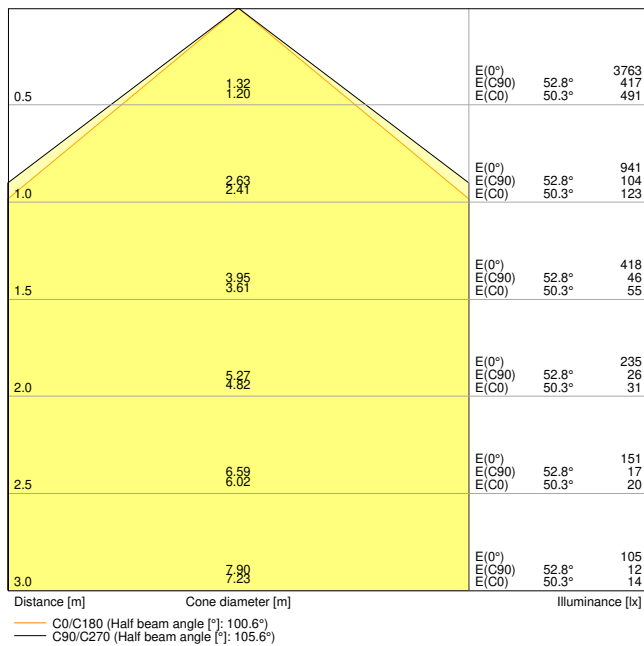


LN SF 600 P 18W 840 WT IP44 DALI

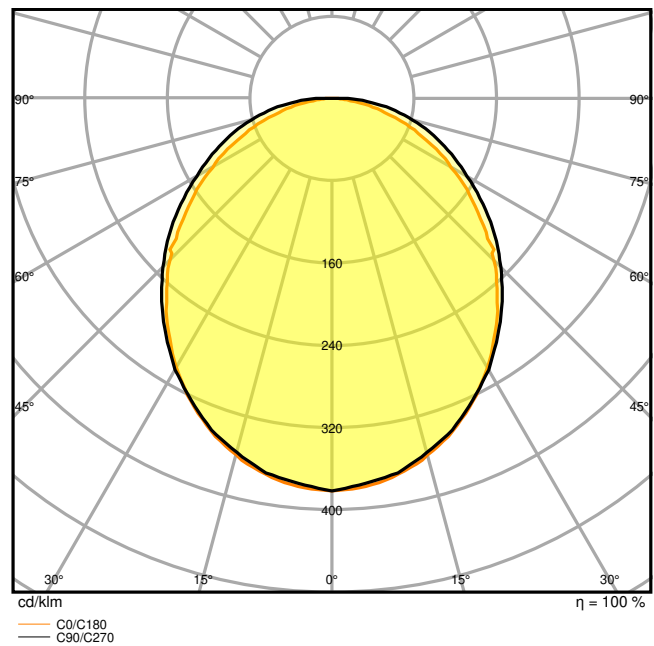

LN SF 600 P 18W 840 WT IP44 DALI

Dimensions & Weight

| | |
|----------------|-----------|
| Length | 608.00 mm |
| Width | 166.00 mm |
| Height | 63.00 mm |
| Product weight | 1500.00 g |



LN SF 600 P 18W WT IP44

Materials & Colors

| | |
|--|--------------------|
| Product color | White |
| Housing color | White |
| Body material | Steel |
| Cover material | Polycarbonate (PC) |
| Light emitting surface material | Polycarbonate (PC) |
| Glow Wire Test according to IEC 60695-2-12 | 650 °C |
| Mercury content | 0.0 mg |

Application & Mounting

| | |
|--|---|
| Ambient temperature range | -20...+40 °C |
| Temperature range at storage | -40...+80 °C |
| Type of connection | Screwless terminal, 5-Pole (L, N, PE, DA+, DA-) |
| Type of protection | IP44 |
| Protection class IK (shock resistance) | IK08 |
| Dimmable | Yes |
| Type of dimming | DALI2 |
| Mounting type | Surface |
| Mounting location | Wall / Ceiling |
| Application environment | Indoor |
| Adjustable | No |
| With light source | Yes |

Lifespan

| | |
|----------------------------|-----------------------|
| Lifespan L70/B50 at 25 °C | 70000 h ¹⁾ |
| Lifespan L80/B10 at 25 °C | 70000 h ¹⁾ |
| Lifespan L80/B50 at 25 °C | 70000 h |
| Lifespan L90/B10 at 25 °C | 50000 h |
| Number of switching cycles | 100000 |

¹⁾ t[h]: L70 / B50 @ 25 °C (Ta), t[h]: L80 / B10 @ 25 °C (Ta), t[h]: L90 / B10 @ 25 °C (Ta)

Control gear

| | |
|-----------------------------|-------------------------------|
| Output current | 420 mA |
| ECG - Output ripple current | < 10 % |
| Recommended control gear | OTi DALI 25/220-240/700 NFC L |

Certificates & Standards

| | |
|--|---------------------------------------|
| Standards | CE / CB / ENEC / TÜV SÜD / UKCA / EAC |
| Luminaire with limited surface temperature, "D sign" | No |
| Ball shot safe | No |
| Replaceable light source (EPREL) | Not replaceable |








Additional product data




| | |
|----------------|---------|
| Added function | VIVARES |
|----------------|---------|








EQUIPMENT / ACCESSORIES

- Equipped with through-wiring cables and connectors
- Tool-free cable strain reliefs included

DOWNLOAD DATA

| Documents and certificates | Document name |
|---|--|
|  User instruction / safety instructions | UI LN SF IP44 DALI |
|  Legal information | Light Source Insert LN SF P WT IP44 DALI |
|  Legal information | Legal insert LN SF P IP44 DALI |
|  Legal information | Informationstext 18 Abs 4 ElektroG |
|  Declarations of conformity | LN SF P WT IP44 DALI |
|  Declarations of conformity UKCA | LN SF WT IP44 DALI |
|  Certificates | ENEC LN SF IP44 DALI |

| Photometric and lighting design files | Document name |
|--|----------------------------------|
|  IES file (IES) | LN SF 600 P 18W 840 WT IP44 DALI |
|  LDT file (Eulumdat) | LN SF 600 P 18W 840 WT IP44 DALI |
|  ULD file (DIALux) | LN SF 600 P 18W 840 WT IP44 DALI |




| Photometric and lighting design files | | Document name |
|---|-------------------------------------|--|
|  | ROLF file (RELUX) | LN SF 600 P 18W 840 WT IP44 DALI |
|  | UGR file (UGR table) | LN SF 600 P 18W 840 WT IP44 DALI |
|  | Light distribution curve type cone | LN SF 600 P 18W 840 WT IP44 DALI |
|  | Light distribution curve type polar | LN SF 600 P 18W 840 WT IP44 DALI |
| CAD/BIM files | | Document name |
|  | BIM Revit 3D | Linear Surface IP44 G2 |
|  | CAD STEP 3D | LN ST IP44 G2 600 |
| Tender texts | | Document name |
|  | Tender documents | LINEAR SURFACE IP44 DALI 600 P 18W 840 WT-EN |




LOGISTICAL DATA

| Product code | Packaging unit (Pieces/Unit) | Dimensions (length x width x height) | Gross weight | Volume |
|---------------|------------------------------|--------------------------------------|--------------|-----------------------|
| 4058075733336 | Folding box 1 | 621 mm x 172 mm x 70 mm | 1750.00 g | 7.48 dm ³ |
| 4058075733343 | Shipping box 4 | 635 mm x 302 mm x 200 mm | 7620.00 g | 38.35 dm ³ |

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

ADDITIONAL CATALOG INFORMATION





References / Links

– For Guarantee see www.ledvance.com/guarantee

DISCLAIMER

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.