

# PRODUCT DATASHEET

## DP COMP 600 V 16W 840 IP66

DAMP PROOF COMPACT GEN 2 | Modern damp-proof luminaires with lumen-switchable versions



### Areas of application

- Industrial and storage facilities
- Car parks and underpasses
- Garages
- Workshops, assembly lines

### Product benefits

- Highly versatile due to available power select versions that allow 2 different lumen packages
- Easy installation as mounting brackets can be positioned freely on the luminaire
- Easy access to electrical terminal thanks to end caps with twist and lock mechanism
- Tool-free electrical connection due to push button connector
- Uniform light distribution
- 5 years guarantee

### Product features

- Power select option available to select between 2 lumen packages
- Lifetime (L80/B10): up to 50,000 h (at 25 °C)
- High luminous efficacy: up to 123 lm/W
- Polycarbonate housing IP66 and IK08
- Beam angle: 120°


## TECHNICAL DATA

### Electrical data


|   |                       |
|---|-----------------------|
| Nominal wattage   | 16.00 W               |
| Nominal voltage   | 220...240 V           |
| Mains frequency   | 50...60 Hz            |
| Nominal current   | 69.000 mA             |
| Inrush current  | 22.4 A                |
| Inrush current time $T_{h50}$                               | 3.92 $\mu$ s          |
| Max. number of luminaires per miniature circuit breaker B16 | 109                   |
| Max. number of luminaires per miniature circuit breaker C10 | 90                    |
| Max. number of luminaires per miniature circuit breaker C16 | 145                   |
| Power factor $\lambda$                                      | > 0.90                |
| Total harmonic distortion                                   | < 20 %                |
| Protection class  | II                    |
| Operating mode  | Integrated LED driver |

### Photometrical data

|  |                    |
|--|--------------------|
| Luminous flux                                | 1920 lm            |
| Luminous efficacy                            | 120 lm/W           |
| Color temperature                            | 4000 K             |
| Light color (designation)                    | Cool White         |
| Color rendering index Ra                     | $\geq 80$          |
| Standard deviation of color matching         | 5 sdc <sub>m</sub> |
| Low flicker                                  | Yes                |
| Flickering metric (Pst LM)                   | $\leq 1$           |
| Stroboscope effect metric (SVM)              | $\leq 0.4$         |
| Photobiological safety group acc. to EN62778 | RG0                |
| Beam angle                                   | 120 °              |

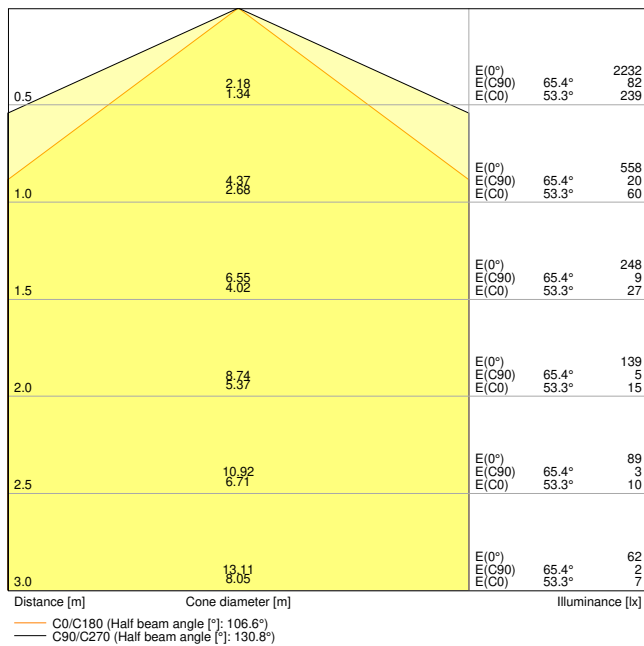


DP COMP 600 V 16W 840 IP66

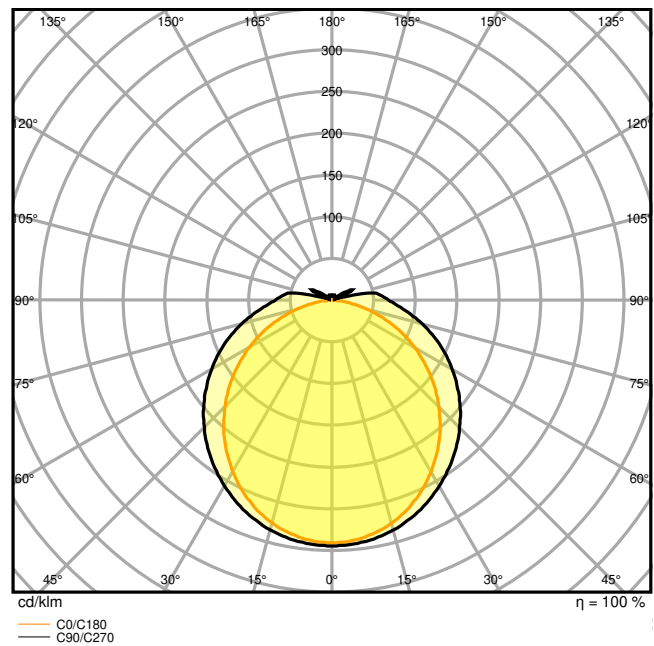

DP COMP 600 V 16W 840 IP66

Dimensions & Weight

|                |           |
|----------------|-----------|
| Length         | 643.00 mm |
| Width          | 60.00 mm  |
| Height         | 53.00 mm  |
| Product weight | 410.00 g  |



DP COMP 600 V

Materials & Colors

|               |                    |
|---------------|--------------------|
| Product color | White              |
| Housing color | White              |
| Body material | Polycarbonate (PC) |

|  |                    |
|--|--------------------|
| Cover material                             | Polycarbonate (PC) |
| Light emitting surface material            | Polycarbonate (PC) |
| Glow Wire Test according to IEC 60695-2-12 | 850 °C             |
| Mercury content                            | 0.0 mg             |

### Application & Mounting

|  |                            |
|--|----------------------------|
| Ambient temperature range              | -20...+45 °C               |
| Temperature range at storage           | -40...+80 °C               |
| Type of connection                     | Screwless terminal, 3-Pole |
| Type of protection                     | IP66                       |
| Protection class IK (shock resistance) | IK08                       |
| Dimmable                               | No                         |
| Mounting type                          | Surface/Suspended          |
| Mounting location                      | Wall / Ceiling             |
| Application environment                | Indoor                     |
| Adjustable                             | No                         |
| With light source                      | Yes                        |

### Lifespan

|                            |                       |
|----------------------------|-----------------------|
| Lifespan L70/B50 at 25 °C  | 75000 h <sup>1)</sup> |
| Lifespan L80/B10 at 25 °C  | 50000 h <sup>1)</sup> |
| Lifespan L80/B50 at 25 °C  | 50000 h               |
| Lifespan L90/B10 at 25 °C  | 32000 h               |
| Number of switching cycles | 100000                |

<sup>1)</sup> t[h]: L70 / B50 @ 25 °C (Ta), t[h]: L80 / B10 @ 25 °C (Ta), t[h]: L90 / B10 @ 25 °C (Ta)

### Control gear

|                             |        |
|-----------------------------|--------|
| Output current              | 170 mA |
| ECG - Output ripple current | < 20 % |

### Certificates & Standards






|  |                                      |
|--|--------------------------------------|
| Standards  | CE / CB / TÜV SÜD / UKCA / EAC / EPD |
| Luminaire with limited surface temperature, "D sign" | Yes                                  |
| Ball shot safe                                       | No                                   |
| EPD  | LEDV-00004-V01.01-EN                 |
| Replaceable light source (EPREL)                     | Not replaceable                      |








### EQUIPMENT / ACCESSORIES



– Stainless steel clamps with safety screws included


– Mounting accessories included (suspension kit, theft protection kit)

DOWNLOAD DATA

| Documents and certificates   |  | Document name                      |
|--|--|------------------------------------|
|  | User instruction / safety instructions | UI DP COMP V                       |
|  | Legal information                      | LSI DP COMP V                      |
|  | Legal information                      | Informationstext 18 Abs 4 ElektroG |
|  | Declarations of conformity             | DP COMP_CE                         |
|  | Declarations of conformity UKCA        | DP COMP IP66                       |

| Photometric and lighting design files  |                                     | Document name              |
|--|-------------------------------------|----------------------------|
|   | IES file (IES)                      | DP COMP 600 V 16W 840 IP66 |
|  | LDT file (Eulumdat)                 | DP COMP 600 V 16W 840 IP66 |
|  | ULD file (DIALux)                   | DP COMP 600 V 16W 840 IP66 |
|  | ROLF file (RELUX)                   | DP COMP 600 V              |
|  | UGR file (UGR table)                | DP COMP 600 V 16W 840 IP66 |
|  | Light distribution curve type cone  | DP COMP 600 V 16W 840 IP66 |
|  | Light distribution curve type polar | DP COMP 600 V 16W 840 IP66 |

| CAD/BIM files  |              | Document name  |
|--|--------------|----------------|
|  | BIM Revit 3D | DP COMP G2     |
|  | CAD STEP 3D  | DP COMP G2 600 |




| Tender texts   | Document name  |
|--|--|
|  | Tender documents<br>DAMP PROOF COMPACT GEN 2 600 V 16W 840 IP66-EN |

LOGISTICAL DATA

| Product code  | Packaging unit (Pieces/Unit) | Dimensions (length x width x height) | Gross weight | Volume                |
|---------------|------------------------------|--------------------------------------|--------------|-----------------------|
| 4058075740853 | Folding box<br>1             | 60 mm x 672 mm x 67 mm               | 527.00 g     | 2.70 dm <sup>3</sup>  |
| 4058075740860 | Shipping box<br>9            | 700 mm x 210 mm x 195 mm             | 5386.00 g    | 28.67 dm <sup>3</sup> |

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

### ADDITIONAL CATALOG INFORMATION



### References / Links

– For Guarantee see [www.ledvance.com/guarantee](http://www.ledvance.com/guarantee)

### DISCLAIMER

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.