

# COMPACT LED EVO N 4800LM PLX RCR DALI I KL. IP20

## 620X620 840 (42W) CORRIDOR

DETAILED CARD



### TECHNICAL PARAMETERS

Ingress protection:	IP20
Impact resistance:	IK07
Nominal power [W]:	42
Luminous flux [lm]*:	4800
Colour temperature [K]:	4000
Colour rendering index:	>80
SDCM:	≤ 3
Energy efficiency class:	E
Material of the body:	ABS
Diffuser material:	PC

### CHARACTERISTICS

Compact LED luminaire designed for surface mounting. Equipped with energy-saving LED modules and an evenly highlighted opal or prismatic diffuser, providing low glare (UGR<19)\*. Made of plastic. Assembly or electrical connection does not require removing the diffuser.

### APPLICATION

This luminaire is designed for indoor use in offices or general utility rooms. It can be used as the main light source and it is particularly well-suited to be used as a light source for workplaces that require eyesight focus. The luminaire is used both in new applications, as well as it can replace traditional fluorescent luminaires with energy-saving LED solutions. The fitting's design is suitable for mounting in 600x600 modular ceilings.

### DETAILS

The corridor function makes it possible to adapt the lighting intensity in objects to changing conditions. In practice, it automatically reduces the lamp's luminous flux from 100% to 10%. Automatic mode 10 to 100 (version with RCR Hytronik motion detector) The lamp constantly illuminates at 10% of its luminous flux. When the motion sensor detects movement in the preset detection field, the lamp lights up to 100% luminous flux and remains on for the preset time. After the preset operating time, the lamp switches to energy-saving mode and illuminates 10% of the luminous flux. It is possible to connect an ON/OFF switch to switch the lamp off completely.

# COMPACT LED EVO N 4800LM PLX RCR DALI I KL. IP20


## 620X620 840 (42W) CORRIDOR

DETAILED CARD

### TECHNICAL PARAMETERS TABLE

Nominal power [W]:	42	Mounting version:	surface
Index:	631030	Working temperature [°C]:	from -25 to +60
Colour temperature [K]:	4000	Motion sensor:	yes
Light source:	LED module	Corridor function:	yes
Luminous flux [lm]:	4800	DIMM DALI:	yes
Diffuser type:	OPAL	CE certificate:	<a href="#">356/2023</a>
Rated power of the luminaire [W]:	43	PZH certificate:	<a href="#">B-BK-60212-0070/20</a> <a href="#">B-BK-60212-0042/20</a>
Supply voltage [V]:	220-240	EAN:	5905963631030
Frequency [Hz]:	50 - 60	Category type:	louvre
Luminous efficacy [lm/W]:	111	LED lifespan L70B50 [h]:	115000
Energy efficiency class:	E	LED lifespan L80B20 [h]:	72000
Electrical protection class:	I	LED lifespan L90B10 [h]:	35000
Colour rendering index:	>80	Warranty [years]:	5
SDCM:	≤ 3	Power factor:	0.95
Diffuser material:	PC	ETIM class:	EC002892
Material of the body:	ABS	Photobiological safety:	Risk Group 1 (no photobiological hazard under normal behavioral limitation)
Colour of the body:	white	Manual:	<a href="#">Download PDF</a>
Dimensions (H/W/T/S) [mm]:	620/620/66	ENEC Certificate:	<a href="#">PL BBJ/009/2021/M1</a>
Impact resistance:	IK07	Plik LDT:	<a href="#">Download</a>
Ingress protection:	IP20		

### LIGHT CURVES

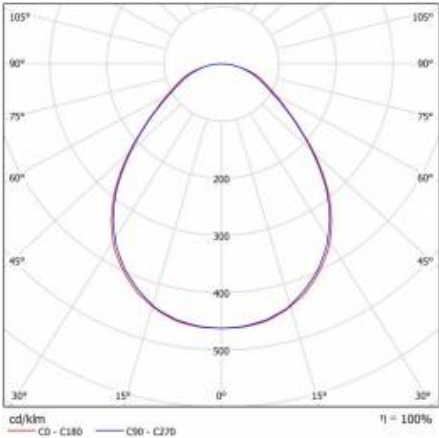


# COMPACT LED EVO N 4800LM PLX RCR DALI I KL. IP20 620X620 840 (42W) CORRIDOR

DETAILED CARD

## ACCESSORIES AVAILABLE

index	Name
630279	Compact - Uchwyt do mocowania natynkowego - specjalny / Holder for surface mounting - special

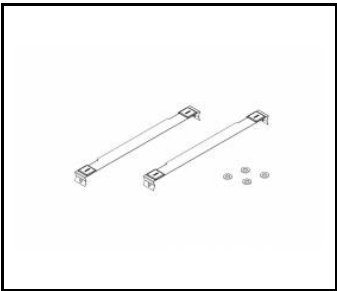

Compact - Uchwyt do mocowania natynkowego - specjalny / Holder for surface mounting - special (630279)

Card creation date: 03 January 2025  
The company reserves the right to make design changes or upgrades in the presented product. Product data sheet does not constitute an offer. \* Parameter tolerance is +/- 10%

 This product is a subject to electric and electronic waste equipment regulations (WEEE).

 Certificate CE - Nr: 356/2023