

Axyl Opera

96700753 AXYL OPERA S WO 1L 930 NB HF ANT


THORN

LED 4W AXYL_OP_S_NB930	IP67	IK09			
------------------------	------	------	---	---	--


Axyl Opera

AXYL Opera, a floor recessed, architectural LED luminaire for decorative facade lighting, with narrow beam distribution. Class I electrical.. Fixed output LED driver. , IP67, Impact strength: IK09. Housing: die-cast aluminium, powder coated textured anthracite. Working ambient temperature: -20°C to +40°C. Complete with 3000K LED..


Dimensions: 85 x 85 x 125 mm
Luminaire input power: 3.6 W
Luminaire luminous flux: 169 lm
Luminaire efficacy: 47 lm/W
Weight: 0.77 kg

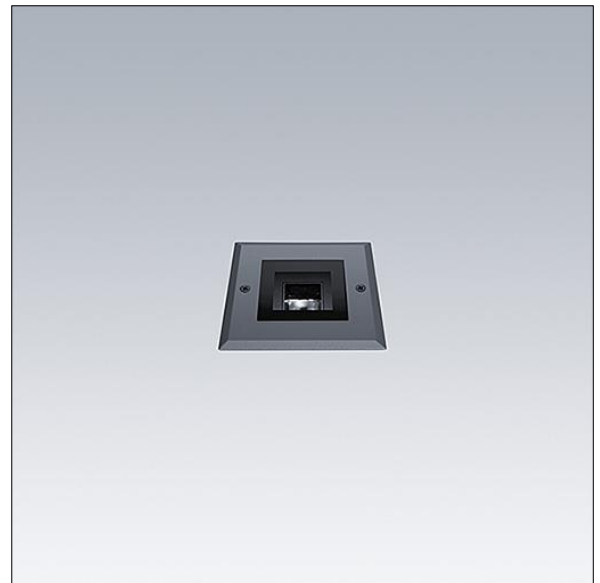

TLG_AXYL_F_OPERA_S_WO_NB_ANT.jpg

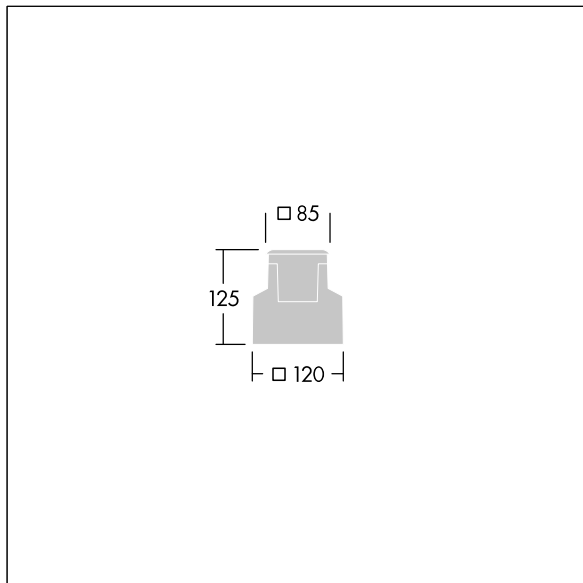

TLG_AXYL_M_OPERA_S.wmf

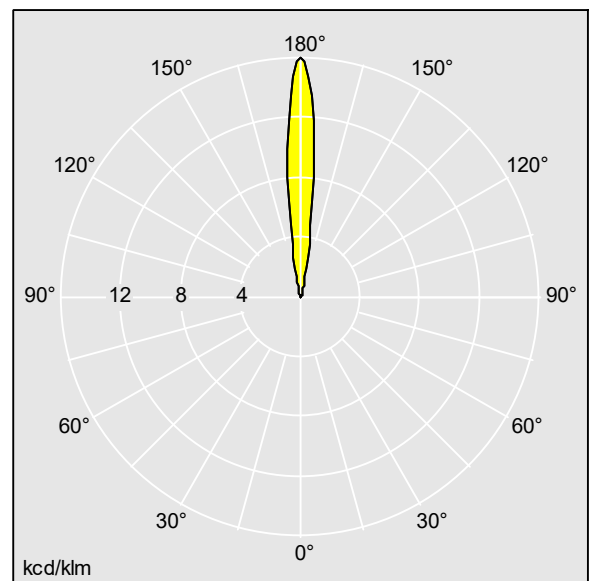

96700753.ltd

Lamp position: STD - standard
Light Source: LED
Luminaire luminous flux*: 169 lm
Luminaire efficacy*: 47 lm/W
Colour Rendering Index min.: 90
Correlated colour temperature*: 3000 Kelvin

Chromaticity tolerance (initial MacAdam): 3
Rated useful life (B10)*:
L80 70000 h at 25 °C
Ballast: 1x LED_DRV
Luminaire input power*: 3.6 W Power factor = 0.45
Dimming: FIX
LOR: 0,99 ULOR: 0,99 DLOR: 0,00

This product contains a light source of energy efficiency class E.

All values marked with an * are rated values. Thorn uses tried and tested components from leading suppliers, however there may be isolated instances of technology-related failures of individual LEDs during the rated product lifetime. International standards set the tolerance in initial flux and connected load at $\pm 10\%$. Unless stated otherwise, the values apply to an ambient temperature of 25°C.

Thorn Lighting is constantly developing and improving its products. The right is reserved to change specifications without prior notification or public announcement.
© Thorn Lighting