




Pole top luminaires  
4051859678991  
D 187, H 572

Pole mounting  
anthracite metallic (DB703)

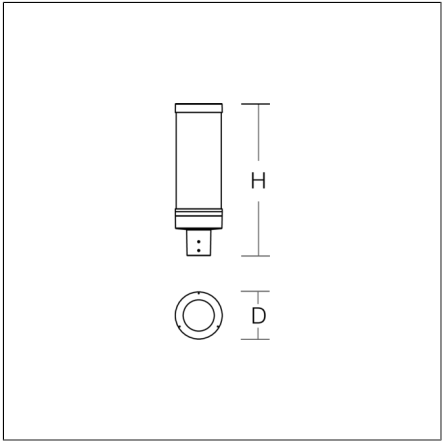

Pole-top luminaire with classic design and modern LED technology. Housing made of corrosion-resistant die-cast aluminium, seawater resistant powder-coated. With stainless steel screws. With membrane valve as a standard to avoid condensed water. Diffuser: glass, transparent. Multi-chip LED with high-performance refractor optics. Symmetrical light distribution Pole attachment for 76 mm spigot. With stainless steel screws. Elegant-looking power supply via delicate steel cables between converter and LED. Converter integrated in the luminaire head. 4 x 1.0 mm² connecting cable included, length 5.5 m. Please order reducer adapter for pole clamp D 60 mm separately. Order the top roof separately as an accessory for the classic lantern shape.

Product specifications

Diameter D	187 mm
Height H	572 mm
Weight	6.1 kg
Light source	LED
Colour temperature	3000 K
Rated luminous flux	2450 lm
System power	20 W
System efficiency	123 lm/W
Glare evaluation UGR (4H 8H)	27,2
Beam angle	153°/153°
Rated life	100000 h (L80/B10)
Colour rendering index (CRI)	70
Colour tolerance	5
Photobiological safety according to EN 62471	Risk group 2
Driver	Converter, dimmable
Control	DALI
Voltage	220 - 240 V / 50 Hz, 60 Hz
Luminaires on B10A fuse	18
Luminaires on B16A fuse	28
Inrush current / Inrush current duration	26 A / 180 µs
CIE Flux Code / CEN Flux Code	15 45 92 100 100
Type of protection	IP 66
Protection class	II
Filament test	960 °C
Impact resistance	IK06
Ambient temperature	-20 °C ... + 40 °C
Conformity mark	CE, EAC

Accessories



982752.0031  
Top roof



982762.000  
Reducing adapter Ø 60 mm